

# GUANGDONG NANGUANG PHOTO&VIDEO SYSTEMS CO., LTD.

Tel: +86-754-85751187 85310187

Fax: +86-754-85300887


E-mail: info@nanlite.com

Service Mail: service@nanlite.com

Add: Dongli Section, Highway 324, Chenghai, Shantou City, Guangdong Province, China



www.nanlite.com

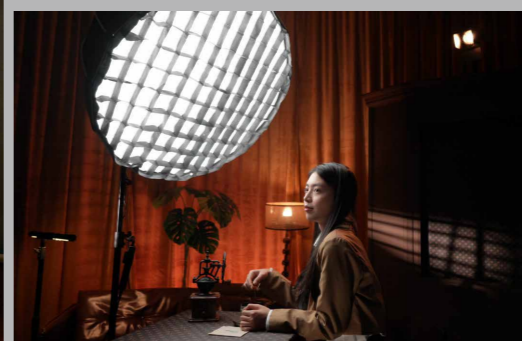

WWW.NANLITE.COM



NANLINK APP  
Download

NL202507-1



FC Series  
Brochure



NANLITE  
Linktree

## NANLITE

### FC Series

LED Spot Light

Guangdong Nanguang Photo&Video Systems Co., Ltd.

From 78W to 520W, the FC series offers a compact fixture that combines eye-catching design, affordability, and excellent performance.



## FC-60B/120B Bi-color

LED Bi-color Spot Light



Rated Power  
78W/145W



PD Adapter



Output Modes  
Maximum &  
Constant



CRI: Average 96  
TLCI: Average 98  
TM-30 Rf: Average 95  
TM-30 Rg: Average 101



CCT Range  
2700K-6500K



Built-in  
12 Practical  
Effects



12,510 lux@1m  
17,450 lux@1m  
(with reflector at 5600K)



Smart/Full Speed  
Low Speed/Off



On-board  
Remote Controller  
NANLINK APP  
DMX/RDM



Firmware  
Upgradable



Compatible with  
FMM Ecosystem  
Modifiers



Lightweight  
Compact Design



### Power by a PD charger or power bank (max brightness):

FC-60B: 30W (30%), 45W (50%), 60-65W (65%), more than 100W (100%)

FC-120B: 30W (15%), 45W (25%), 60-65W (35%), more than 100W (60%), more than 140W (100%)

### Includes

Light × 1, Power Adapter × 1, Reflector × 1, AC Power Cable 4.5M × 1,

\*BT-BG-FZ60 Battery Grip × 1 (\*FC-60B only), AS-BA-FMM Bowens Adapter × 1, User Manual × 1, Carry Case × 1

## FC-120C Full-color

### LED RGBW Spot Light



Rated Power  
145W



PD Adapter



Output Modes  
Maximum &  
Constant



CRI: Average 95  
TLCI: Average 94  
TM-30 Rf: Average 92  
TM-30 Rg: Average 100



CCT Range  
2700K-7500K



FC-120C



±150



HSI/RGBW



Built-in  
15 Practical  
Effects



12,850 lux@1m  
(with reflector at 5600K)



Smart/Full Speed  
Low Speed/Off



On-board  
Remote Controller  
NANLINK APP  
DMX/RDM



Firmware  
Upgradable



Compatible with  
FMM Ecosystem  
Modifiers



Lightweight  
All-in-one Design

#### Power by a PD charger or power bank (max brightness):

30W (15%), 45W (25%), 60-65W (35%), 100W (60%), more than 140W (100%)

#### Includes

Light × 1, Power Adapter × 1, Reflector × 1, AC Power Cable 4.5M × 1, AS-BA-FMM Bowens Adapter × 1, User Manual × 1, Carry Case × 1

## FC-300B / 500B Bi-color

### LED Bi-color Spot Light



Rated Power  
350W/520W



Output Modes  
Maximum &  
Constant



CRI: Average 96  
TLCI: Average 98  
TM-30 Rf: Average 95  
TM-30 Rg: Average 101/  
Average 100



CCT Range  
2700K-6500K



Built-in  
12 Practical  
Effects



66,010 lux@1m  
106,500 lux@1m  
(with reflector at 5600K)



Smart/Full Speed  
Low Speed/Off



On-board  
Remote Controller  
NANLINK APP  
DMX/RDM



Firmware  
Upgradable



Compatible with  
Bowens Mount  
Modifiers



Lightweight  
All-in-one Design



FC-300B

FC-500B

#### Includes

Light × 1, Power Supply × 1, Reflector × 1, AC Power Cable 6M × 1, DC Connection Cable 3M × 1 (\*FC-500B only), User Manual × 1, Carry Case × 1

# FC-500C Full-color

## LED RGBW Spot Light



Rated Power  
520W



Output Modes  
Maximum &  
Constant



CRI: Average 95  
TLCl: Average 94  
TM-30 Rf: Average 92  
TM-30 Rg: Average 100



CCT Range  
2700K-7500K



FC-500C



±150



HSI/RGBW/Gel



Built-in  
15 Practical  
Effects



77,110 lux@1m  
(with reflector at 5600K)



Smart/Full Speed  
Low Speed/Off



On-board  
Remote Controller  
NANLINK APP  
DMX/RDM



Firmware  
Upgradable



Compatible with  
Bowens Mount  
Modifiers



Lightweight  
Compact Design

### Includes

Light × 1, Power Supply × 1, Reflector × 1, Quick Release Clamp × 1, AC Power Cable 6M × 1, DC Connection Cable 3M × 1, User Manual × 1, Carry Case × 1

## Control



CB-DMX-3.5C-1/2  
DMX Adapter Cable with  
3.5mm Connector



WS-TB-1  
NANLINK BOX



BT-BCS-48V3.5mm  
FC PowerController  
(for FC-300B/FC-500B/FC-500C)

## FM Mount Accessories (Optional)



LT-FMM-60  
FM Mount  
Lantern Softbox 60cm



SB-FMM-60  
FM Mount Softbox 60cm



SB-FMM-O-40  
FM Mount  
Octagonal Softbox 40cm



SB-FMM-O-60  
FM Mount  
Octagonal Softbox 60cm



AS-DD-FMM  
Diffusion Dome for  
FM Mount Reflector



FL-11  
Fresnel Lens



PJ-FMM-10/19/36  
FM Mount Projection Attachment  
with 10°/19°/36° Lens



PJ-FMM-18-36  
FM Mount  
Projection Attachment 18°-36°

## Bowens Mount Accessories (Optional)



**LT-65/LT-80/LT-120**  
Lantern Softbox



**U-135DS/U-165DT/U-180ST**  
Umbrella



**SB-RP90/120**  
Rapid 90/120 Parabolic Softbox



**SB-PR-150-Q**  
Quick Release Parabolic Softbox 150cm  
EC-PR150 Eggcrate



**SB-ST-140×30** Strip Softbox  
**SB-AS-110×45** Asymmetric Softbox  
**SB-RT-90×60** Rectangular Softbox  
EC-140×30/EC-110×45 Eggcrate



**BDR-BM-40/70**  
BM40/70 Beauty Dish Reflector

## Bowens Mount Accessories (Optional)



**FL-20G**  
Fresnel Lens



**BD-BM-RF45**  
Barndoor for RF45 Reflector



**PJ-BM-19/36**  
Bowens Mount  
Projection Attachment



**PJ-BM-25-45**  
Bowens Mount  
Projection Attachment 25°-45°

## FC Kit



(The light stands  
are not included)

### FC-60B/120B 2KIT-PT

- Light × 2
- Power Adapter × 2
- RF-FMM-45 Reflector × 2
- AC Power Cable 4.5M × 2
- AS-DD-FMM Diffusion Dome for FM Mount Reflector × 2 (FC-120B Only)
- BT-BG-XLR4II V-Mount Battery Grip × 2 (FC-120B Only)
- User Manual × 1
- GUTEK T-300 Protector Case (Black) × 1

## FC Kit



### FC-300B/500B 2KIT-ST

- Light × 2
- Power Supply × 2
- Reflector × 2
- AC Power Cable 6M × 2
- DC Connection Cable 3M × 2 (FC-500B Only)
- COB Protective Cap × 2
- SB-RT-90×60 Rectangular Softbox × 2
- User Manual × 2 (FC-300B/500B+softbox)
- Trolley Case × 1



### FC-300B/500B 2KIT-ST-LS

- Light × 2
- Power Supply × 2
- Reflector × 2
- AC Power Cable 6M × 2
- DC Connection Cable 3M × 2 (FC-500B Only)
- COB Protective Cap × 2
- SB-RT-90×60 Rectangular Softbox × 2
- LS-186-5/8 Light Stand × 2
- User Manual × 2 (FC-300B/500B+softbox)
- Trolley Case × 1



### FC-500B/500C KIT-PC

- Light × 1
- Power Supply × 1
- Reflector × 1
- Quick Release Clamp × 1
- AC Power Cable 6M × 1
- DC Connection Cable 3M × 1
- COB Protective Cap × 1
- FC PowerController × 1
- 3M DC Connection Cable with 3.5mm Connector × 1
- User Manual × 2 (FC-500B/500C+FC PowerController)
- Carrying Bag × 1

## FC Technical Data

Model	FC-60B	FC-120B
Rated Power	78W	145W
Input Voltage /Current	DC 15V/6A Max AC 100-240V 50/60Hz	DC 24V/6.25A Max AC 100-240V 50/60Hz
CRI/TLCI	Average 96 / Average 98	
TM-30 Rf/Rg	Average 95 / Average 101	
CCT	2700K-6500K	
Dimming	0-100%	
Control	On-board, Remote Controller, NANLINK APP, DMX/RDM	
Special Effects	CCT Loop, INT Loop, Flash, Pulse, Storm, TV, Paparazzi, Candle/Fire, Bad Bulb, Firework, Explosion and Welding	
Product Size	169.2 × 106.4 × 180.4mm / 6.66 × 4.19 × 7.10"	191.2 × 115 × 193.1mm / 7.53 × 4.53 × 7.60"
Product Weight	0.7kg / 1.54lb	0.98kg / 2.16lb

### Illumination (lux / fc)

CCT	FC-60B(2700K)			FC-60B(3200K)			FC-60B(5600K)			FC-120B(2700K)			FC-120B(3200K)			FC-120B(5600K)		
	1M	3M	5M	1M	3M	5M	1M	3M	5M	1M	3M	5M	1M	3M	5M	1M	3M	5M
Distance																		
Light Only	2453 lux 228 fc	301 lux 28 fc	120 lux 11 fc	2686 lux 250 fc	330 lux 31 fc	132 lux 12 fc	3027 lux 281 fc	372 lux 35 fc	150 lux 14 fc	4125 lux 383 fc	500 lux 46 fc	196 lux 18 fc	4709 lux 437 fc	571 lux 53 fc	224 lux 21 fc	5333 lux 495 fc	646 lux 60 fc	253 lux 24 fc
With Reflector	8536 lux 793 fc	792 lux 74 fc	294 lux 27 fc	9440 lux 877 fc	876 lux 81 fc	324 lux 30 fc	10790 lux 1002 fc	996 lux 93 fc	368 lux 34 fc	13250 lux 1231 fc	1204 lux 112 fc	448 lux 42 fc	15110 lux 1404 fc	1382 lux 128 fc	512 lux 48 fc	17450 lux 1621 fc	1583 lux 147 fc	586 lux 54 fc
With FL-11 Spot	26340 lux 2447 fc	2444 lux 227 fc	867 lux 81 fc	29200 lux 2713 fc	2710 lux 252 fc	955 lux 89 fc	32950 lux 3061 fc	3075 lux 286 fc	1078 lux 100 fc	39840 lux 3701 fc	4120 lux 383 fc	1469 lux 136 fc	45310 lux 4209 fc	4731 lux 440 fc	1686 lux 157 fc	51680 lux 4801 fc	5392 lux 501 fc	1924 lux 179 fc
With FL-11 Flood	6234 lux 579 fc	730 lux 68 fc	273 lux 25 fc	6843 lux 636 fc	803 lux 75 fc	301 lux 28 fc	7707 lux 716 fc	904 lux 84 fc	340 lux 32 fc	10100 lux 938 fc	1158 lux 108 fc	442 lux 41 fc	11550 lux 1073 fc	1325 lux 123 fc	507 lux 47 fc	13120 lux 1219 fc	1497 lux 139 fc	578 lux 54 fc
With PJ-FMM-10	/	28220 lux 2622 fc	10730 lux 997 fc	/	31130 lux 2892 fc	11770 lux 1093 fc	/	35400 lux 3289 fc	13440 lux 1249 fc	/	38880 lux 3612 fc	14450 lux 1342 fc	/	16530 lux 1536 fc	5245 lux 481 fc	/	49840 lux 4630 fc	18760 lux 1743 fc
With PJ-FMM-19	40880 lux 3798 fc	3090 lux 287 fc	1052 lux 98 fc	44880 lux 4169 fc	3399 lux 316 fc	1158 lux 108 fc	50600 lux 4701 fc	3810 lux 354 fc	1308 lux 122 fc	56490 lux 5248 fc	4480 lux 416 fc	1536 lux 143 fc	65040 lux 6042 fc	5091 lux 473 fc	1744 lux 162 fc	75060 lux 6973 fc	5710 lux 530 fc	1956 lux 182 fc
With PJ-FMM-36	14620 lux 1358 fc	1160 lux 108 fc	400 lux 37 fc	16150 lux 1500 fc	1280 lux 119 fc	442 lux 41 fc	18310 lux 1701 fc	1461 lux 136 fc	503 lux 47 fc	21530 lux 2000 fc	1731 lux 161 fc	594 lux 55 fc	24490 lux 2275 fc	1962 lux 182 fc	678 lux 63 fc	27660 lux 2570 fc	2205 lux 205 fc	765 lux 71 fc

**FC** Technical Data

<b>Model</b>	<b>FC-120C</b>
<b>Rated Power</b>	145W
<b>Input Voltage /Current</b>	DC 24V/6.25A Max AC 100-240V 50/60Hz PD3.1(15-28V)30W Min
<b>CRI / TLCI</b>	Average 95 / Average 94
<b>TM-30 Rf/Rg</b>	Average 92 / Average 100
<b>CCT</b>	2700K-7500K (G/M±150)
<b>Dimming</b>	0-100%
<b>Control</b>	On-board, Remote Controller, NANLINK APP, DMX/RDM
<b>Special Effects</b>	HUE Loop, CCT Loop, INT Loop, Flash, Pulse, Storm, Police Car, TV, Paparazzi, Candle/Fire, Disco, Bad Bulb, Firework, Explosion and Welding
<b>Product Size</b>	191.2 × 115 × 193.1mm / 7.53 × 4.53 × 7.60"
<b>Product Weight</b>	1.13kg / 2.49lb

**Illumination (lux / fc)**

CCT	2700K			3200K			5600K			R			G			B		
	1M	3M	5M	1M	3M	5M	1M	3M	5M	1M	3M	5M	1M	3M	5M	1M	3M	5M
<b>Light Only</b>	7335 lux 681 fc	839 lux 78 fc	319 lux 30 fc	7617 lux 708 fc	873 lux 81 fc	331 lux 31 fc	7508 lux 697 fc	857 lux 80 fc	324 lux 30 fc	1638 lux 152 fc	186 lux 17 fc	73 lux 7 fc	3315 lux 308 fc	379 lux 35 fc	143 lux 13 fc	610 lux 57 fc	71 lux 7 fc	26 lux 2 fc
<b>With Reflector</b>	12490 lux 1160 fc	1221 lux 113 fc	452 lux 42 fc	13100 lux 1217 fc	1278 lux 119 fc	471 lux 44 fc	12850 lux 1194 fc	1255 lux 117 fc	463 lux 43 fc	2694 lux 250 fc	271 lux 25 fc	100 lux 9 fc	5740 lux 533 fc	555 lux 52 fc	206 lux 19 fc	1060 lux 98 fc	103 lux 10 fc	38 lux 4 fc
<b>With FL-11 Spot</b>	34270 lux 384 fc	3317 lux 308 fc	1169 lux 109 fc	35920 lux 3337 fc	3462 lux 322 fc	1212 lux 113 fc	35170 lux 3267 fc	3372 lux 313 fc	1179 lux 110 fc	7430 lux 690 fc	725 lux 67 fc	250 lux 23 fc	15230 lux 1415 fc	1462 lux 136 fc	509 lux 47 fc	2870 lux 267 fc	277 lux 26 fc	97 lux 9 fc
<b>With FL-11 Flood</b>	15830 lux 1471 fc	1768 lux 164 fc	646 lux 60 fc	16490 lux 1532 fc	1845 lux 171 fc	673 lux 63 fc	16150 lux 1500 fc	1809 lux 168 fc	657 lux 61 fc	3404 lux 316 fc	382 lux 35 fc	136 lux 13 fc	7040 lux 654 fc	791 lux 73 fc	288 lux 27 fc	1330 lux 124 fc	149 lux 14 fc	54 lux 5 fc
<b>With PJ-FMM-10</b>	/	12320 lux 1145 fc	3881 lux 361 fc	/	12800 lux 1189 fc	4050 lux 376 fc	/	12460 lux 1158 fc	3901 lux 362 fc	/	2728 lux 253 fc	835 lux 78 fc	/	5299 lux 492 fc	1653 lux 154 fc	/	980 lux 91 fc	316 lux 29 fc
<b>With PJ-FMM-19</b>	45980 lux 4272 fc	3545 lux 329 fc	1206 lux 112 fc	47770 lux 4438 fc	3695 lux 343 fc	1258 lux 117 fc	46370 lux 4308 fc	3595 lux 334 fc	1223 lux 114 fc	9910 lux 921 fc	785 lux 73 fc	268 lux 25 fc	19740 lux 1834 fc	1531 lux 142 fc	520 lux 48 fc	3780 lux 351 fc	293 lux 27 fc	99 lux 9 fc
<b>With PJ-FMM-36</b>	16970 lux 1577 fc	1376 lux 128 fc	471 lux 44 fc	17840 lux 1657 fc	1433 lux 133 fc	488 lux 45 fc	17260 lux 1603 fc	1389 lux 129 fc	475 lux 44 fc	3735 lux 347 fc	304 lux 28 fc	104 lux 10 fc	7327 lux 681 fc	592 lux 55 fc	202 lux 19 fc	1410 lux 131 fc	113 lux 10 fc	38 lux 4 fc

**FC** Technical Data

<b>Model</b>	<b>FC-300B</b>	<b>FC-500B</b>
<b>Rated Power</b>	350W	520W
<b>Input Voltage /Current</b>	DC 48V/6.6A Max AC 100-240V 50/60Hz	DC 48V/10.4A Max AC 100-240V 50/60Hz
<b>CRI/TLCI</b>	Average 96 / Average 98	
<b>TM-30 Rf/Rg</b>	Average 95 / Average 101	Average 95 / Average 100
<b>CCT</b>	2700K-6500K	
<b>Dimming</b>	0-100%	0-100%, by 0.1% increment
<b>Control</b>	On-board, Remote Controller, NANLINK APP, DMX/RDM	
<b>Special Effects</b>	CCT Loop, INT Loop, Flash, Pulse, Storm, TV, Paparazzi, Candle/Fire, Bad Bulb, Firework, Explosion and Welding	
<b>Product Size</b>	360.3 × 246.4 × 134.8mm / 14.19 × 9.70 × 5.31"	373.2 × 246.4 × 149mm / 14.69 × 9.70 × 5.87"
<b>Product Weight</b>	2.6kg / 5.73lb	3.16kg / 6.97lb

**Illumination (lux / fc)**



CCT	FC-300B(2700K)			FC-300B(3200K)			FC-300B(5600K)			FC-500B(2700K)			FC-500B(3200K)			FC-500B(5600K)		
	1M	3M	5M	1M	3M	5M	1M	3M	5M	1M	3M	5M	1M	3M	5M	1M	3M	5M
<b>Distance</b>	1M	3M	5M	1M	3M	5M	1M	3M	5M	1M	3M	5M	1M	3M	5M	1M	3M	5M
<b>Light Only</b>	8685 lux 807 fc	1082 lux 101 fc	437 lux 41 fc	10627 lux 987 fc	1319 lux 123 fc	525 lux 49 fc	11210 lux 1041 fc	1380 lux 128 fc	561 lux 52 fc	16320 lux 1516 fc	2010 lux 187 fc	803 lux 75 fc	17660 lux 1641 fc	2224 lux 207 fc	907 lux 84 fc	21110 lux 1961 fc	2624 lux 244 fc	1065 lux 99 fc
<b>With Reflector</b>	50840 lux 4723 fc	4427 lux 411 fc	1612 lux 150 fc	64890 lux 6028 fc	5674 lux 527 fc	2040 lux 190 fc	66010 lux 6132 fc	5808 lux 540 fc	2086 lux 194 fc	81200 lux 7543 fc	7123 lux 662 fc	2597 lux 241 fc	89400 lux 8305 fc	7725 lux 718 fc	2796 lux 260 fc	106500 lux 9894 fc	9402 lux 873 fc	3393 lux 315 fc
<b>Distance</b>	1M	3M	5M	1M	3M	5M	1M	3M	5M	3M	5M	7M	3M	5M	7M	3M	5M	7M
<b>With FL-20G Spot</b>	92698 lux 8612 fc	8727 lux 811 fc	3040 lux 282 fc	119720 lux 11122 fc	11184 lux 1039 fc	3903 lux 363 fc	135778 lux 12614 fc	12576 lux 1168 fc	4370 lux 406 fc	15420 lux 1433 fc	5422 lux 504 fc	2790 lux 259 fc	17560 lux 1631 fc	6123 lux 569 fc	3154 lux 293 fc	22340 lux 2075 fc	7791 lux 724 fc	3987 lux 370 fc
<b>With FL-20G Flood</b>	23400 lux 2174 fc	2765 lux 257 fc	1076 lux 100 fc	29780 lux 2767 fc	3528 lux 328 fc	1345 lux 125 fc	30270 lux 2812 fc	3592 lux 334 fc	1386 lux 129 fc	4914 lux 457 fc	1878 lux 174 fc	1031 lux 96 fc	5481 lux 509 fc	2113 lux 196 fc	1157 lux 107 fc	6507 lux 605 fc	2514 lux 234 fc	1362 lux 127 fc
<b>Distance</b>	3M	5M	7M	3M	5M	7M	3M	5M	7M	3M	5M	7M	3M	5M	7M	3M	5M	7M
<b>With PJ-BM-19</b>	9636 lux 895 fc	3092 lux 287 fc	1532 lux 142 fc	10638 lux 988 fc	3426 lux 318 fc	1685 lux 157 fc	12090 lux 1123 fc	3905 lux 363 fc	1916 lux 178 fc	15330 lux 1424 fc	5042 lux 468 fc	2511 lux 233 fc	17250 lux 1603 fc	5600 lux 520 fc	2758 lux 256 fc	21550 lux 2002 fc	6942 lux 645 fc	3411 lux 317 fc
<b>With PJ-BM-36</b>	3259 lux 303 fc	1102 lux 102 fc	558 lux 52 fc	3569 lux 332 fc	1210 lux 112 fc	615 lux 57 fc	4014 lux 373 fc	1360 lux 126 fc	696 lux 65 fc	5515 lux 512 fc	1914 lux 178 fc	972 lux 90 fc	6114 lux 568 fc	2101 lux 195 fc	1070 lux 99 fc	7598 lux 706 fc	2590 lux 241 fc	1332 lux 124 fc

## FC Technical Data

Model	FC-500C
Rated Power	520W
Input Voltage /Current	DC 48V/10.8A Max, AC 100-240V 50/60Hz
CRI / TLCI	Average 95 / Average 94
TM-30 Rf/Rg	Average 92 / Average 100
CCT	2700K-7500K (G/M±150)
Dimming	0-100%, by 0.1% increment
Control	On-board, Remote Controller, NANLINK APP, DMX/RDM
Special Effects	HUE Loop, CCT Loop, INT Loop, Flash, Pulse, Storm, Police Car, TV, Paparazzi, Candle/Fire, Disco, Bad Bulb, Firework, Explosion and Welding
Product Size	373.2 × 246.4 × 149mm / 14.69 × 9.70 × 5.87"
Product Weight	3.91kg / 8.62lb

### Illumination (lux / fc)

CCT	2700K			3200K			5600K			R			G			B		
	1M	3M	5M	1M	3M	5M	1M	3M	5M	1M	3M	5M	1M	3M	5M	1M	3M	5M
<b>Light Only</b>	26280 lux 2441 fc	3033 lux 282 fc	1173 lux 109 fc	27970 lux 2598 fc	3215 lux 299 fc	1245 lux 116 fc	28770 lux 2673 fc	3303 lux 307 fc	1281 lux 119 fc	5660 lux 526 fc	654 lux 61 fc	252 lux 23 fc	12930 lux 1201 fc	1485 lux 138 fc	577 lux 54 fc	2240 lux 208 fc	256 lux 24 fc	99 lux 9 fc
<b>With Reflector</b>	70540 lux 6553 fc	7056 lux 656 fc	2557 lux 238 fc	74660 lux 6936 fc	7500 lux 697 fc	2712 lux 252 fc	77110 lux 7164 fc	7687 lux 714 fc	2805 lux 261 fc	15270 lux 1419 fc	1528 lux 142 fc	554 lux 51 fc	34630 lux 3217 fc	3440 lux 320 fc	1267 lux 118 fc	6750 lux 627 fc	600 lux 56 fc	215 lux 20 fc
<b>With FL-20G Spot</b>	14530 lux 1350 fc	4988 lux 463 fc	2390 lux 222 fc	15290 lux 1420 fc	5271 lux 490 fc	2533 lux 235 fc	15600 lux 1449 fc	5386 lux 500 fc	2578 lux 239 fc	2928 lux 272 fc	1004 lux 93 fc	492 lux 46 fc	6897 lux 641 fc	2385 lux 222 fc	1152 lux 107 fc	1230 lux 114 fc	420 lux 39 fc	204 lux 19 fc
<b>With FL-20G Flood</b>	6215 lux 577 fc	2353 lux 219 fc	1248 lux 116 fc	6587 lux 612 fc	2498 lux 232 fc	1326 lux 123 fc	6738 lux 626 fc	2542 lux 236 fc	1349 lux 125 fc	1240 lux 115 fc	475 lux 44 fc	255 lux 24 fc	3021 lux 281 fc	1143 lux 106 fc	608 lux 56 fc	530 lux 49 fc	199 lux 18 fc	106 lux 10 fc
<b>With PJ-BM-19</b>	15170 lux 1409 fc	4807 lux 447 fc	2402 lux 223 fc	16340 lux 1518 fc	5127 lux 476 fc	2546 lux 237 fc	16790 lux 1560 fc	5258 lux 488 fc	2620 lux 243 fc	3077 lux 286 fc	918 lux 85 fc	506 lux 47 fc	7400 lux 687 fc	2397 lux 223 fc	1178 lux 109 fc	1300 lux 121 fc	430 lux 40 fc	202 lux 19 fc
<b>With PJ-BM-36</b>	5454 lux 507 fc	1843 lux 171 fc	925 lux 86 fc	5853 lux 544 fc	1958 lux 182 fc	976 lux 91 fc	6023 lux 560 fc	2020 lux 188 fc	1017 lux 94 fc	1118 lux 104 fc	375 lux 35 fc	187 lux 17 fc	2707 lux 251 fc	903 lux 84 fc	454 lux 42 fc	460 lux 43 fc	155 lux 14 fc	78 lux 7 fc

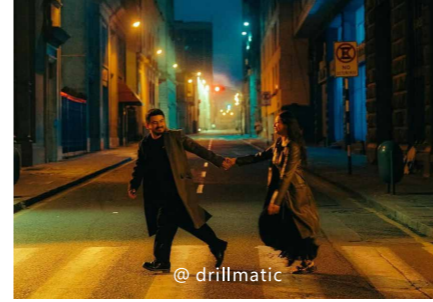

## Commercial Shooting

## Photography



## Interview/Live Stream

