

GUANGDONG NANGUANG PHOTO&VIDEO SYSTEMS CO., LTD.

Tel: +86-754-85751187 85310187

Fax: +86-754-85300887

E-mail: info@nanlite.com

Service Mail: service@nanlite.com

Add: Dongli Section, Highway 324, Chenghai, Shantou City, Guangdong Province, China



WWW.NANLITE.COM



NANLINK APP
Download



NANLITE
Catalogue



NANLITE
Linktree

NL202508-1

NANLITE

Forza Series
LED Spot Light

Guangdong Nanguang Photo&Video Systems Co., Ltd.

Compact Design, Ultra Bright



Forza 60B II

Brighter · Quieter · Better



Rated Power
72W



AC/DC
Supply



Output Modes
Maximum & Constant



CRI: 95+
TLCI: 98+
TM-30 Rf: 93
TM-30 Rg: 100



CCT Range
2700K-6500K



Built-in
12 Practical
Effects



14,350 lux@1m
(with reflector
at 5600K)



~20dBA



On-board
NANLINK APP
Remote Controller
DMX/RDM



Firmware
Upgradable



Compatible
with FMM
Ecosystem
Modifiers



Lightweight
Compact
Design



Includes

Light × 1, Power Adapter × 1, Power Cable 3M × 1, COB Protective Cap × 1, RF-FMM-45-S Reflector × 1, BT-BG-FZ60 Battery Grip × 1, AS-BA-FMM Bowens Adapter × 1, Carrying Bag × 1, User Manual × 1

Forza 60C/60CR

Palm-sized, Full Spectrum



Rated Power
88W



AC/DC
Supply



Output Modes
Maximum &
Constant



CRI: Average 96
TLCI: Average 95
TM-30 Rf: Average 93
TM-30 Rg: Average 100



CCT Range
1800K-2000K



±100



RGBLAC



HSI/RGBW/XY



Built-in
15 Practical
Effects



12,810 lux@1m
(with reflector at 5600K)



~20dBA



On-board
NANLINK APP
Remote Controller
DMX/RDM
*LumenRadio CRMX
(*Forza 60CR only)



Firmware
Upgradable



Compatible with
FMM Ecosystem
Modifiers



Lightweight
Compact Design



Includes

Light × 1, Power Adapter × 1, Power Cable 3M × 1, RF-FMM-45-S Reflector × 1, COB Protective Cap × 1, AS-BA-FMM Bowens Adapter × 1, BT-BG-FZ60 Battery Grip × 1, Carrying Bag × 1, User Manual × 1

Forza 150B

Portable · Capable · Silent



Rated Power
170W



AC/DC
Supply



CRI: 96+
TLCI: 98+
TM-30 Rf: 93+
TM-30 Rg: 102



CCT Range
2700K-6500K



Built-in 12
Practical Effects



23,130 lux@1m
(with reflector
at 5600K)



On-board
NANLINK APP
Remote Controller
DMX/RDM



Firmware
Upgradable



Compatible with
FMM Ecosystem
Modifiers



Lightweight
Compact Design



Includes

Light × 1, Power Adapter × 1, Power Cable 4.5M × 1, RF-FMM-45 Reflector × 1, AS-BA-FMM Bowens Adapter × 1, COB Protective Cap × 1, Carrying Bag × 1, User Manual × 1, DMX Reference Guide × 1

FM Mount Accessories (Optional)



WS-TB-1
NANLINK BOX



CB-DT/DC
D-tap Cable
for Forza 60B II/
60C/60CR




CB-DMX-3.5C-1/2
DMX Adapter Cable
with 3.5mm Connector



FL-11
Fresnel Lens



SB-FMM-60
FM Mount Softbox 60cm
FM & Bowens Mount
EC-FMM60 Eggcrate

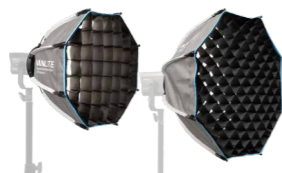

SB-FMM-O-40/60
FM Mount Octagonal
Softbox 40/60cm



LT-FMM-60
Lantern Softbox 60cm
FM & Bowens Mount



AS-DD-FMM
Diffusion Dome for
FM Mount Reflector



BT-BG-FZ60
Battery Grip
for Forza 60B II/60C/60CR
(work with NP-F batteries)



BT-BG-XLR4 II
V-Mount Battery Grip
with 4-Pin XLR Connector
for Forza 150B

Forza 300B / 500B II

Match Any Light Source



Rated Power
350W/580W



AC/DC
Supply



Output Modes
Maximum & Constant



CRI: 96+
TLCI: 97+
TM-30 Rf: 94+
TM-30 Rg: 102



CCT Range
2700K-6500K



±80



Built-in 12
Practical Effects



43,480 lux@1m
67,320 lux@1m
(with reflector at 5600K)



SMART/FULL SPEED
LOW SPEED/OFF



~23dBA



On-board
NANLINK APP
Remote Controller
DMX/RDM



Firmware
Upgradable



Compatible with
Bowens Mount
Ecosystem Modifiers



Integrated Control
Unit & Power Adapter



Quick Release
Device



Lightweight
Compact Design



Includes

Light × 1, Control Unit × 1, DC Connection Cable 3M × 1, AC Power Cable 6M × 1, Reflector × 1, COB Protective Cap × 1, Quick Release Clamp × 1, User Manual × 1, DMX Reference Guide × 1, Carrying Bag × 1

Forza 720B

Light Redefined, Form Reshaped



Rated Power
800W



AC/DC
Supply



Output Modes
Maximum & Constant



CRI: 95+
TLCI: 96+
TM-30 Rf: 93+
TM-30 Rg: 102



CCT Range
2700K-6500K



Built-in 12
Practical Effects



7,919 lux@3m
(with reflector at 5600K)



~20dBA



On-board
NANLINK APP
Remote Controller
DMX/RDM



Firmware
Upgradable



Compatible with
Bowers Mount
Ecosystem Modifiers



Integrated Control
Unit & Power Adapter



Quick Release
Device



Lightweight
Compact Design



Forza 720B

Includes

Light × 1, Control Unit × 1, DC Connection Cable 5M × 1, AC Power Cable 4.5M × 1, Reflector × 1, COB Protective Cap × 1, Quick Release Clamp × 1, Carrying Bag × 1, User Manual × 1, DMX Reference Guide × 1

Bowens Mount Accessories (Optional)



WS-TB-1
NANLINK BOX



CB-FZ-7.5M
DC Connection Cable 7.5M



CB-FZ-12M
DC Connection Cable 12M



FL-20G
Fresnel Lens
for Forza 300 II/300B II/
500 II/500B II



BT-V-14.8V160
V-Mount Battery 14.8V 160Wh



BT-CGV-14.8V-1
Battery Charger for Single 14.8V
V-mount Battery



BT-V-26V230/BT-V-26V270
V-Mount Battery 26V 230Wh/
270Wh



BT-CGV-26V-1/BT-CGV-26V-2
Battery Charger for Single
Dual 26VV-mount Battery



BT-V-14.4V98
Li-ion Battery 14.4V 98Wh



BT-V-14.8V300
Li-ion Battery 14.8V 302Wh



BT-V-26V489
Li-ion Battery 26V 489Wh

Bowens Mount Accessories (Optional)



SB-ST-140×30 Strip Softbox
SB-AS-110×45 Asymmetric Softbox
SB-RT-90×60 Rectangular Softbox
EC-140×30/EC-110×45 Eggcrate




SB-PR-90/120/150-Q Quick Release Parabolic Softbox
EC-PR90/120/150 Eggcrate



U-135DS/U-165DT/U-180ST
 Umbrella



LT-80/LT-120
 Lantern Softbox

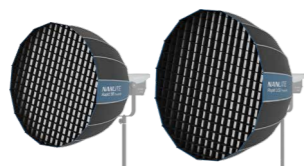

SB-RP90/120
 Rapid 90/120 Parabolic Softbox



BDR-BM-40/70
 BM40/70 Beauty Dish Reflector



BD-BM-RF45
 Barndoor for RF45 Reflector

Forza Kit (The light stands are not included)



Forza 60B II/60C/60CR 3KIT-PT

- Light × 3
- Power Adapter 15V/6A × 3
- Power Cable 3M × 3
- COB Protective Cap × 3
- RF-FMM-45-S Reflector × 3
- BT-BG-FZ60 Battery Grip × 3
- Bowens Adapter × 1
- FL-11 Fresnel Lens × 1
- User Manual × 2
- WRT-26 Plastic Trolley Case × 1



Forza 300B/500B II 2KIT-ST

- Light × 2
- Control Unit × 2
- COB Protective Cap × 2
- Reflector × 2
- DC Connection Cable 3M × 2
- AC Power Cable 6M × 2
- Quick Release Clamp × 2
- DMX Reference Guide × 1
- User Manual × 1
- Trolley Case × 1

Forza Kit (The light stands are not included)



Forza 300B/500B II KIT-FL-ST

- Light × 1
- Control Unit × 1
- DC Connection Cable 3M × 1
- AC Power Cable 6M × 1
- Reflector × 1
- COB Protective Cap × 1
- Quick Release Clamp × 1
- FL-20G Fresnel Lens × 1
- User Manual × 1
- Trolley Case × 1



Forza 720B KIT-ST

- Light × 1
- Control Unit × 1
- DC Connection Cable 5M × 1
- AC Power Cable 6M × 1
- Reflector × 1
- COB Protective Cap × 1
- Quick Release Clamp × 1
- User Manual × 1
- DMX Reference Guide × 1
- CC-ST-FZ720 Trolley Case × 1

Forza Kit (The light stands are not included)



Forza 60B II/60C/60CR KIT-PJ-FMM (19°&36°)

- | | |
|------------------------------|--|
| Light × 1 | GOBO × 4 (different patterns) |
| Power Adapter 15V6A × 1 | GOBO Holder × 1 |
| Power Cable 3M × 1 | M Size GOBO Holder × 1 |
| RF-FMM-45-S Reflector × 1 | Gel Frame × 1 |
| COB Protective Cap × 1 | User Manual × 2 (Forza 60B II/60C/60CR + PJ-FMM) |
| BT-BG-FZ60 Battery Grip × 1 | DMX Reference Guide × 1 (Forza 60B II only) |
| AS-BA-FMM Bowens Adapter × 1 | Carrying Bag × 1 |
| PJ-FMM × 1 | |
| PJ-FMM-LENS-19 × 1 | |
| PJ-FMM-LENS-36 × 1 | |



@ Jean-Francois Awad




@ Kal Visuals



@ 徐蒙正



Commercial Shooting

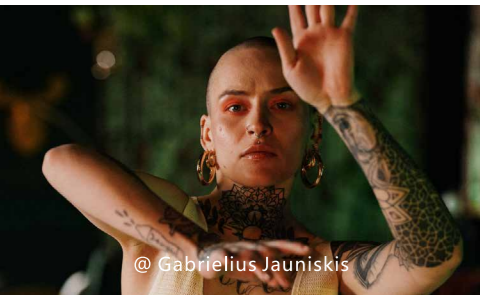

@ Gabrielius Jauniskis



@ Steven Divish



@ Trần Diệp Minh Chiến



Film Production



@ 陈品华



@ Polina Novozhilova



@ Andrew Murphy

Photography



@ Pooya Hoseinnezhad



@ Alvin Fauzi



@ Martin Krolop



@ Vivienne Bade



Interview Scene/Live Stream



@ 小龙



@ Kal Visuals



@ 典韬



@ Alexandru Don

Projection Attachment (Optional)

FM Mount



PJ-FMM-10/19/36
FM Mount
Projection Attachment



PJ-FMM-18-36
FM Mount
Projection Attachment 18°-36°



PJ-FMM/BM-AI
Adjustable Iris Diaphragm
Compatible with: PJ-FMM-10/19/36,
PJ-FMM-18-36, PJ-BM-25-45



PJ-FMM-LENS-10
10° Lens for PJ-FMM

Bowens Mount



PJ-BM-19/36
Bowens Mount
Projection Attachment



PJ-FMM/BM-LENS-19
19° Lens for PJ-FMM/BM



PJ-BM-25-45
Bowens Mount
Projection Attachment 25°-45°




PJ-FMM/BM-LENS-36
36° Lens for PJ-FMM/BM



NL/NLB/M05



NL/NLB/M07



NL/NLB/M09



NL/NLB/M11



NL/NLB/M13




NL/NLB/M06



NL/NLB/M08



NL/NLB/M10



NL/NLB/M12



NL/NLB/M14

AS-GB-FMM-SET1
FM Mount Projection Attachment Gobo Set 1
Compatible with: PJ-FMM-10/19/36, PJ-FMM-18-36

AS-GB-B-SET1
Bowens Mount Projection Attachment Gobo Set 1
Compatible with: PJ-BM-19/36

AS-GB-M-SET1
M Size Gobo Set 1
Compatible with: PJ-FMM-10/19/36, PJ-FMM-18-36, PJ-BM-25-45




NL/NLB/M15



NL/NLB/M17



NL/NLB/M19



NL/NLB/M21



NL/NLB/M23



NL/NLB/M16



NL/NLB/M18



NL/NLB/M20



NL/NLB/M22



NL/NLB/M24

AS-GB-FMM-SET2
FM Mount Projection Attachment Gobo Set 2
Compatible with: PJ-FMM-10/19/36, PJ-FMM-18-36

AS-GB-B-SET2
Bowens Mount Projection Attachment Gobo Set 2
Compatible with: PJ-BM-19/36

AS-GB-M-SET2
M Size Gobo Set 2
Compatible with: PJ-FMM-10/19/36, PJ-FMM-18-36, PJ-BM-25-45

Forza Technical Data

Model	Forza 60B II
Rated Power	72W
Input Voltage/Current	DC 15V/6A Max, AC 100-240V 50/60Hz
CRI/TLCI	Average 96 / Average 98
TM-30 Rf/Rg	Average 93 / Average 100
CCT	2700K-6500K
Dimming	0-100%
Control	On-board, Remote Controller, NANLINK APP, DMX/RDM
Special Effects	CCT Loop, INT Loop, Flash, Pulse, Storm, TV, Paparazzi, Candle/Fire, Bad Bulb, Firework, Explosion and Welding
Product Size/Weight	200 × 108 × 84mm / 7.87 × 4.25 × 3.31", 0.7kg / 1.54lb

Illumination (lux / fc)

CCT	2700K			3200K			5600K			6500K		
	1M	2M	3M	1M	2M	3M	1M	2M	3M	1M	2M	3M
Distance												
Light Only	2096 lux 195 fc	533 lux 50 fc	254 lux 24 fc	2235 lux 208 fc	569 lux 53 fc	270 lux 25 fc	2577 lux 239 fc	649 lux 60 fc	308 lux 29 fc	2529 lux 235 fc	646 lux 60 fc	307 lux 29 fc
With Reflector	11430 lux 1062 fc	2540 lux 236 fc	1098 lux 102 fc	12170 lux 1131 fc	2731 lux 254 fc	1182 lux 110 fc	14350 lux 1333 fc	3186 lux 296 fc	1381 lux 128 fc	14090 lux 1309 fc	3183 lux 296 fc	1372 lux 127 fc
With FL-11 Spot	28260 lux 2625 fc	6520 lux 606 fc	2823 lux 262 fc	30120 lux 2798 fc	6986 lux 649 fc	3045 lux 283 fc	34700 lux 3224 fc	8202 lux 762 fc	3563 lux 331 fc	34550 lux 3210 fc	8071 lux 750 fc	3540 lux 329 fc
With FL-11 Flood	5472 lux 508 fc	1378 lux 128 fc	623 lux 58 fc	5887 lux 547 fc	1464 lux 136 fc	665 lux 62 fc	6852 lux 637 fc	1725 lux 160 fc	769 lux 71 fc	6810 lux 633 fc	1713 lux 159 fc	759 lux 71 fc
With PJ-FMM-10	/	35000 lux 3251 fc	13180 lux 1224 fc	/	37120 lux 3448 fc	14010 lux 1302 fc	/	40640 lux 3775 fc	15340 lux 1425 fc	/	40560 lux 3768 fc	15320 lux 1423 fc
With PJ-FMM-19	42640 lux 3961 fc	7650 lux 711 fc	3086 lux 287 fc	45560 lux 4233 fc	8154 lux 758 fc	3305 lux 307 fc	53070 lux 4930 fc	9377 lux 871 fc	3826 lux 355 fc	52950 lux 4919 fc	9352 lux 869 fc	3822 lux 355 fc
With PJ-FMM-36	18050 lux 1677 fc	3320 lux 308 fc	1390 lux 129 fc	19210 lux 1785 fc	3583 lux 333 fc	1475 lux 137 fc	21980 lux 2042 fc	4113 lux 382 fc	1714 lux 159 fc	21650 lux 2011 fc	4109 lux 382 fc	1695 lux 157 fc
Distance	1M	3M	5M	1M	3M	5M	1M	3M	5M	1M	3M	5M
With PJ-FMM-18-36(18°)	43650 lux 4055 fc	2576 lux 239 fc	834 lux 77 fc	46600 lux 4329 fc	2754 lux 256 fc	895 lux 83 fc	53710 lux 4990 fc	3185 lux 296 fc	1049 lux 97 fc	53600 lux 4979 fc	3178 lux 295 fc	1043 lux 97 fc
With PJ-FMM-18-36(36°)	23470 lux 2180 fc	1512 lux 140 fc	500 lux 46 fc	25020 lux 2324 fc	1615 lux 150 fc	535 lux 50 fc	28560 lux 2653 fc	1852 lux 172 fc	613 lux 57 fc	28510 lux 2649 fc	1850 lux 172 fc	613 lux 57 fc

Forza Technical Data

Model	Forza 60C	Forza 60CR
Rated Power	88W	
Input Voltage/Current	DC 15V/6A Max, AC 100-240V 50/60Hz	
CRI / TLCI	Average 96 / Average 95	
TM-30 Rf/Rg	Average 93 / Average 100	
CCT	1800K-20000K (G/M±100)	
Dimming	0-100%	
Control	On-board, Remote Controller, NANLINK APP, DMX/RDM, *LumenRadio CRMX(*Forza 60CR only)	
Special Effects	HUE Loop, CCT Loop, INT Loop, Flash, Pulse, Storm, Police Car, TV, Paparazzi, Candle/Fire, Disco, Bad Bulb, Firework, Explosion and Welding	
Product Size/Weight	224 × 110 × 88mm / 8.82 × 4.33 × 3.46", 1.08kg / 2.38lb	224 × 110 × 88mm / 8.82 × 4.33 × 3.46", 1.16kg / 2.56lb

Illumination (lux / fc)

CCT	2700K			3200K			5600K			R			G			B		
	1M	2M	3M	1M	2M	3M	1M	2M	3M	1M	2M	3M	1M	2M	3M	1M	2M	3M
Distance																		
Light Only	5656 lux 525 fc	1402 lux 130 fc	631 lux 59 fc	5694 lux 529 fc	1433 lux 133 fc	648 lux 60 fc	5709 lux 530 fc	1425 lux 132 fc	646 lux 60 fc	1282 lux 119 fc	317 lux 29 fc	142 lux 13 fc	3855 lux 358 fc	953 lux 89 fc	428 lux 40 fc	520 lux 48 fc	129 lux 12 fc	59 lux 5 fc
With Reflector	12470 lux 1158 fc	2839 lux 264 fc	1238 lux 115 fc	12750 lux 1184 fc	2939 lux 273 fc	1278 lux 119 fc	12810 lux 1190 fc	2946 lux 274 fc	1283 lux 119 fc	2886 lux 268 fc	656 lux 61 fc	290 lux 27 fc	8792 lux 817 fc	2016 lux 187 fc	876 lux 81 fc	1200 lux 111 fc	275 lux 26 fc	120 lux 11 fc
With FL-11 Spot	35260 lux 3276 fc	8303 lux 771 fc	3539 lux 329 fc	36350 lux 3377 fc	8506 lux 790 fc	3660 lux 340 fc	37520 lux 3486 fc	8780 lux 816 fc	3804 lux 353 fc	9440 lux 877 fc	2171 lux 202 fc	935 lux 87 fc	24750 lux 2299 fc	5753 lux 534 fc	2503 lux 233 fc	4940 lux 459 fc	790 lux 73 fc	340 lux 32 fc
With FL-11 Flood	10800 lux 1003 fc	2720 lux 253 fc	1222 lux 114 fc	11000 lux 1022 fc	2777 lux 258 fc	1248 lux 116 fc	11310 lux 1051 fc	2858 lux 266 fc	1279 lux 119 fc	2594 lux 241 fc	656 lux 61 fc	293 lux 27 fc	7480 lux 695 fc	1879 lux 175 fc	838 lux 78 fc	1020 lux 95 fc	256 lux 24 fc	115 lux 11 fc
With PJ-FMM-10	90970 lux 8451 fc	33050 lux 3070 fc	13170 lux 1223 fc	95820 lux 8902 fc	34420 lux 3198 fc	13410 lux 1246 fc	92320 lux 8577 fc	33080 lux 3073 fc	13270 lux 1233 fc	26400 lux 2453 fc	10600 lux 985 fc	3564 lux 331 fc	61900 lux 5751 fc	23900 lux 2220 fc	8568 lux 796 fc	10600 lux 985 fc	4020 lux 373 fc	1110 lux 103 fc
With PJ-FMM-19	40690 lux 3780 fc	7673 lux 713 fc	3164 lux 294 fc	41920 lux 3894 fc	7899 lux 734 fc	3259 lux 303 fc	42700 lux 3967 fc	8045 lux 747 fc	3313 lux 308 fc	9950 lux 924 fc	1870 lux 174 fc	767 lux 71 fc	28310 lux 2630 fc	5272 lux 490 fc	2144 lux 199 fc	5330 lux 495 fc	680 lux 63 fc	280 lux 26 fc
With PJ-FMM-36	16130 lux 1498 fc	3135 lux 291 fc	1300 lux 121 fc	16610 lux 1543 fc	3269 lux 304 fc	1358 lux 126 fc	17500 lux 1626 fc	3468 lux 322 fc	1440 lux 134 fc	4160 lux 386 fc	812 lux 75 fc	338 lux 31 fc	11800 lux 1096 fc	2284 lux 212 fc	943 lux 88 fc	1540 lux 143fc	310 lux 29 fc	126 lux 12 fc
Distance	1M	3M	5M	1M	3M	5M	1M	3M	5M	1M	3M	5M	1M	3M	5M	1M	3M	5M
With PJ-FMM-18-36(18°)	47160 lux 4381 fc	2778 lux 258 fc	915 lux 85 fc	48560 lux 4511 fc	2881 lux 268 fc	942 lux 88 fc	46070 lux 4280 fc	2775 lux 258 fc	902 lux 84 fc	12880 lux 1197 fc	751 lux 70 fc	246 lux 23 fc	30650 lux 2847 fc	1844 lux 171 fc	600 lux 56 fc	5120 lux 476 fc	232 lux 22 fc	79 lux 7 fc
With PJ-FMM-18-36(36°)	25730 lux 2390 fc	1716 lux 159 fc	573 lux 53 fc	26430 lux 2455 fc	1763 lux 164 fc	587 lux 55 fc	25250 lux 2346 fc	1690 lux 157 fc	564 lux 52 fc	6980 lux 648 fc	468 lux 43 fc	160 lux 15 fc	17310 lux 1608 fc	1170 lux 109 fc	389 lux 36 fc	2080 lux 193 fc	144 lux 13 fc	50 lux 5 fc

Forza Technical Data

Model	Forza 150B
Rated Power	170W
Input Voltage/Current	DC 24V / 7.5A Max, AC 100-240V 50/60Hz
CRI/TLCI	Average 96 / Average 98
TM-30 Rf/Rg	Average 93 / Average 102
CCT	2700K-6500K
Dimming	0-100%
Control	On-board, Remote Controller, NANLINK APP, DMX/RDM
Special Effects	CCT Loop, INT Loop, Flash, Pulse, Storm, TV, Paparazzi, Candle/Fire, Bad Bulb, Firework, Explosion and Welding
Product Size/Weight	247 × 133 × 115mm / 9.72 × 5.24 × 4.53", 1.56kg / 3.44lb

Illumination (lux / fc)

CCT	2700K			3200K			5600K			6500K		
	1M	2M	3M	1M	2M	3M	1M	2M	3M	1M	2M	3M
Light Only	3824 lux 355 fc	1019 lux 95 fc	492 lux 46 fc	4170 lux 387 fc	1127 lux 105 fc	520 lux 48 fc	5121 lux 476 fc	1352 lux 126 fc	644 lux 60 fc	5223 lux 485 fc	1381 lux 128 fc	654 lux 61 fc
With Reflector	17500 lux 1626 fc	3874 lux 360 fc	1600 lux 149 fc	18860 lux 1752 fc	4084 lux 379 fc	1753 lux 163 fc	23130 lux 2149 fc	4826 lux 448 fc	2078 lux 193 fc	23660 lux 2198 fc	5026 lux 467 fc	2135 lux 198 fc
With FL-11 Spot	41300 lux 3837 fc	9800 lux 910 fc	4290 lux 399 fc	45370 lux 4215 fc	10800 lux 1003 fc	4732 lux 440 fc	54290 lux 5044 fc	13050 lux 1212 fc	5721 lux 531 fc	55500 lux 5156 fc	13110 lux 1218 fc	5813 lux 540 fc
With FL-11 Flood	9350 lux 869 fc	2390 lux 222 fc	1087 lux 101 fc	10300 lux 957 fc	2630 lux 244 fc	1187 lux 110 fc	12460 lux 1158 fc	3150 lux 293 fc	1444 lux 134 fc	12750 lux 1184 fc	3206 lux 298 fc	1466 lux 136 fc
With PJ-FMM-10	/	46050 lux 4278 fc	17550 lux 1630 fc	/	48600 lux 18350 fc	18350 lux 1705 fc	/	57950 lux 5384 fc	21960 lux 2040 fc	/	58770 lux 5460 fc	22410 lux 2082 fc
With PJ-FMM-19	59360 lux 5515 fc	10590 lux 984 fc	4224 lux 392 fc	64480 lux 5990 fc	11680 lux 1085 fc	4605 lux 428 fc	76560 lux 7112 fc	14000 lux 1301 fc	5594 lux 520 fc	77550 lux 7204 fc	14300 lux 1328 fc	5700 lux 530 fc
With PJ-FMM-36	23450 lux 2179 fc	4437 lux 412 fc	1871 lux 174 fc	25600 lux 2378 fc	4982 lux 463 fc	1972 lux 183 fc	30700 lux 2852 fc	5920 lux 550 fc	2467 lux 229 fc	31090 lux 2888 fc	6019 lux 559 fc	2522 lux 234 fc
Distance	1M	3M	5M	1M	3M	5M	1M	3M	5M	1M	3M	5M
With PJ-FMM-18-36(18°)	65800 lux 6113 fc	3893 lux 362 fc	1273 lux 118 fc	69180 lux 6427 fc	4094 lux 380 fc	1341 lux 125 fc	81720 lux 7592 fc	4862 lux 452 fc	1597 lux 148 fc	83320 lux 7740 fc	4948 lux 460 fc	1625 lux 151 fc
With PJ-FMM-18-36(36°)	35760 lux 3322 fc	2353 lux 219 fc	786 lux 73 fc	37730 lux 3505 fc	2481 lux 230 fc	828 lux 77 fc	45090 lux 4189 fc	2972 lux 276 fc	993 lux 92 fc	45930 lux 4267 fc	3028 lux 281 fc	1012 lux 94 fc

Forza Technical Data

Model	Forza 300B II
Rated Power	350W
Input Voltage/Current	DC (Battery) 14.4V-14.8V/12A, AC 100-240V 50/60Hz
CRI/TLCI	Average 96 / Average 97
TM-30 Rf/Rg	Average 94 / Average 102
CCT	2700K-6500K (G/M±80)
Dimming	0-100%
Control	On-board, Remote Controller, NANLINK APP, DMX/RDM
Special Effects	CCT Loop, INT Loop, Flash, Pulse, Storm, TV, Paparazzi, Candle/Fire, Bad Bulb, Firework, Explosion and Welding
Product Size/Weight	330 × 228 × 123mm / 12.99 × 8.98 × 4.84", 2.9kg / 6.39lb

Illumination (lux / fc)

CCT	3200K			5600K		
	1M	3M	5M	1M	3M	5M
Light Only	10780 lux / 1001 fc	1336 lux / 124 fc	558 lux / 52 fc	13790 lux / 1281 fc	1682 lux / 156 fc	700 lux / 65 fc
With Reflector	34260 lux / 3183 fc	3167 lux / 294 fc	1208 lux / 112 fc	43480 lux / 4039 fc	4016 lux / 373 fc	1535 lux / 143 fc
With FL-20G Spot	120000 lux / 11148 fc	10980 lux / 1020 fc	3801 lux / 353 fc	151000 lux / 14028 fc	13720 lux / 1275 fc	4767 lux / 443 fc
With FL-20G Flood	32260 lux / 2997 fc	3963 lux / 368 fc	1531 lux / 142 fc	40420 lux / 3755 fc	4955 lux / 460 fc	1927 lux / 179 fc
With PJ-BM-19	/	10580 lux / 983 fc	3434 lux / 319 fc	/	13390 lux / 1244 fc	4296 lux / 399 fc
With PJ-BM-36	50800 lux / 4719 fc	3694 lux / 343 fc	1234 lux / 115 fc	63070 lux / 5859 fc	4576 lux / 425 fc	1527 lux / 142 fc
With PJ-BM-25-45(25°)	30390 lux / 2823 fc	2044 lux / 190 fc	675 lux / 63 fc	37810 lux / 3513 fc	2527 lux / 235 fc	835 lux / 78 fc
With PJ-BM-25-45(45°)	17080 lux / 1587 fc	1250 lux / 116 fc	422 lux / 39 fc	21460 lux / 1994 fc	1567 lux / 146 fc	529 lux / 49 fc

Forza Technical Data

Model	Forza 500B II
Rated Power	580W
Input Voltage/Current	DC (Battery) 14.4V-26V/12A, AC 100-240V 50/60Hz
CRI/TLCI	Average 96 / Average 97
TM-30 Rf/Rg	Average 94 / Average 101
CCT	2700K-6500K (G/M±80)
Dimming	0-100%, by 0.1% increment
Control	On-board, Remote Controller, NANLINK APP, DMX/RDM
Special Effects	CCT Loop, INT Loop, Flash, Pulse, Storm, TV, Paparazzi, Candle/Fire, Bad Bulb, Firework, Explosion and Welding
Product Size/Weight	400 × 230 × 142mm / 15.75 × 9.06 × 5.59", 4.34kg / 9.57lb

Illumination (lux / fc)

CCT	3200K			5600K		
	3M	5M	7M	3M	5M	7M
Distance						
Light Only	2367 lux / 220 fc	987 lux / 92 fc	541 lux / 50 fc	2739 lux / 254 fc	1140 lux / 106 fc	623 lux / 58 fc
With Reflector	5312 lux / 493 fc	1992 lux / 185 fc	1103 lux / 102 fc	6108 lux / 567 fc	2302 lux / 214 fc	1276 lux / 119 fc
With FL-20G Spot	14860 lux / 1380 fc	5149 lux / 478 fc	2618 lux / 243 fc	17400 lux / 1616 fc	5938 lux / 552 fc	2995 lux / 278 fc
With FL-20G Flood	6242 lux / 580 fc	2341 lux / 217 fc	1273 lux / 118 fc	7098 lux / 659 fc	2673 lux / 248 fc	1455 lux / 135 fc
With PJ-BM-19	13920 lux / 1293 fc	4450 lux / 413 fc	2200 lux / 204 fc	16010 lux / 1487 fc	5057 lux / 470 fc	2522 lux / 234 fc
With PJ-BM-36	4915 lux / 457 fc	1670 lux / 155 fc	868 lux / 81 fc	5686 lux / 528 fc	1950 lux / 181 fc	988 lux / 92 fc
With PJ-BM-25-45(25°)	2965 lux / 275 fc	1003 lux / 93 fc	499 lux / 46 fc	3469 lux / 322 fc	1171 lux / 109 fc	584 lux / 54 fc
With PJ-BM-25-45(45°)	1573 lux / 146 fc	532 lux / 49 fc	271 lux / 25 fc	1860 lux / 173 fc	630 lux / 59 fc	321 lux / 30 fc

Forza Technical Data

Model	Forza 720B
Rated Power	800W
Input Voltage/Current	DC 48V/16.67A Max, AC 100-240V 50/60Hz
CRI/TLCI	Average 96 / Average 97
TM-30 Rf/Rg	Average 95 / Average 102
CCT	2700K-6500K
Dimming	0-100%, by 0.1% increment
Control	On-board, Remote Controller, NANLINK APP, DMX/RDM
Special Effects	CCT Loop, INT Loop, Flash, Pulse, Storm, TV, Paparazzi, Candle/Fire, Bad Bulb, Firework, Explosion and Welding
Product Size/Weight	518 × 228 × 142mm / 20.39 × 8.98 × 5.59", 5.3kg / 11.7lb

Illumination (lux / fc)

CCT	2700K			3200K			5600K			6500K		
	3M	5M	7M	3M	5M	7M	3M	5M	7M	3M	5M	7M
Distance												
Light Only	2385 lux / 222 fc	1064 lux / 99 fc	528 lux / 49 fc	2644 lux / 246 fc	1192 lux / 111 fc	595 lux / 55 fc	3116 lux / 289 fc	1407 lux / 131 fc	716 lux / 67 fc	3074 lux / 286 fc	1386 lux / 129 fc	705 lux / 65 fc
With Reflector	5854 lux / 544 fc	2319 lux / 215 fc	1248 lux / 116 fc	6604 lux / 614 fc	2618 lux / 243 fc	1423 lux / 132 fc	7919 lux / 736 fc	3152 lux / 293 fc	1714 lux / 159 fc	7886 lux / 733 fc	3121 lux / 290 fc	1710 lux / 159 fc
With PJ-BM-19	12970 lux / 1205 fc	4163 lux / 387 fc	2064 lux / 192 fc	14590 lux / 1355 fc	4713 lux / 438 fc	2321 lux / 216 fc	17440 lux / 1620 fc	5631 lux / 523 fc	2761 lux / 256 fc	14360 lux / 1334 fc	5524 lux / 513 fc	2746 lux / 255 fc
With PJ-BM-36	4476 lux / 416 fc	1583 lux / 147 fc	840 lux / 78 fc	5101 lux / 474 fc	1788 lux / 166 fc	933 lux / 87 fc	6098 lux / 567 fc	2123 lux / 197 fc	1105 lux / 103 fc	6034 lux / 561 fc	2090 lux / 194 fc	1094 lux / 102 fc
With PJ-BM-25-45(25°)	3915 lux / 364 fc	1317 lux / 122 fc	649 lux / 60 fc	4255 lux / 395 fc	1426 lux / 132 fc	702 lux / 65 fc	4727 lux / 439 fc	1578 lux / 147 fc	775 lux / 72 fc	4637 lux / 431 fc	1545 lux / 144 fc	757 lux / 70 fc
With PJ-BM-25-45(45°)	2305 lux / 214 fc	785 lux / 73 fc	398 lux / 37 fc	2513 lux / 233 fc	853 lux / 79 fc	434 lux / 40 fc	2786 lux / 259 fc	943 lux / 88 fc	477 lux / 44 fc	2721 lux / 253 fc	921 lux / 86 fc	466 lux / 43 fc