



# PavoTube II 15C/30C

LED RGBWW Tube Light

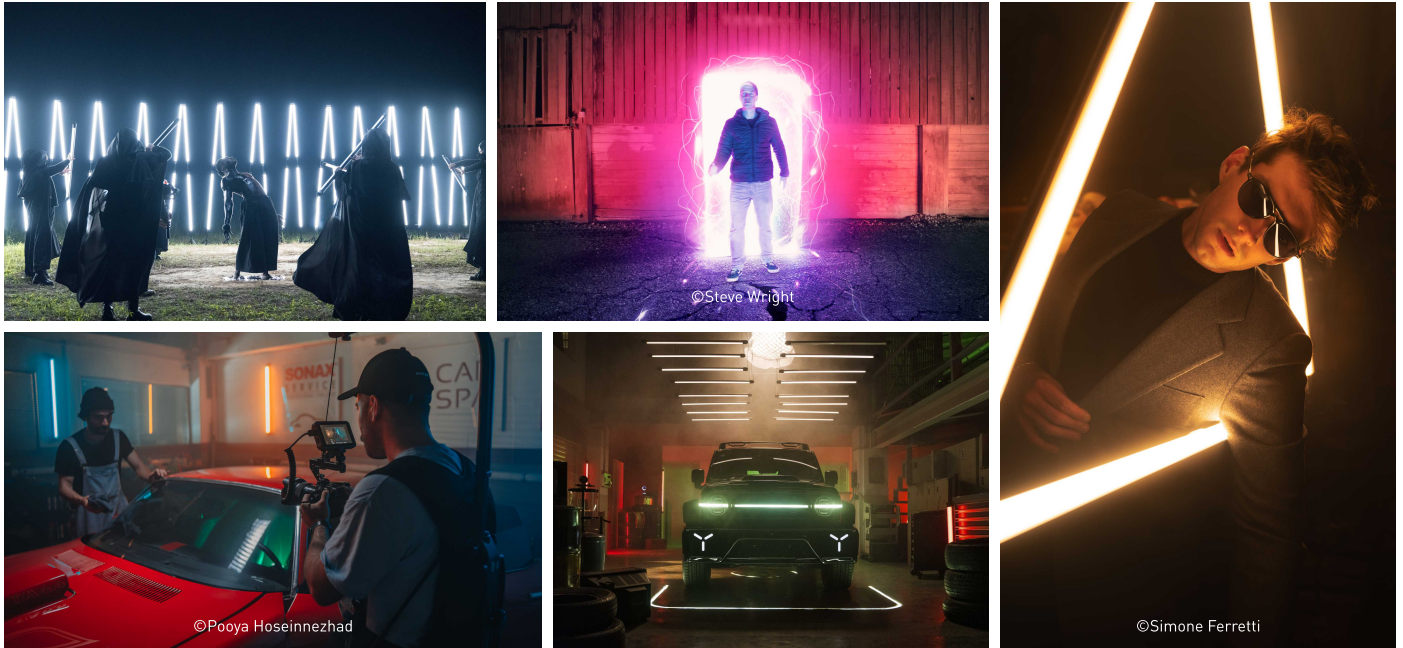

- 1. Excellent Color Rendition** CRI average 97, TLCI average 98, CCT range 2700-7500K with G/M adjustment.
- 2. Intuitive Operation** Two knobs, two buttons and one slide switch for straightforward on-board control.
- 3. Multiple Power Supply Availability** Powered by built-in battery, or by the included 15V/2A (PavoTube II 15C) or 15V/4A (PavoTube II 30C) power adapter, or by PD 3.0 power supplying devices.
- 4. More Control Choices** Built-in Bluetooth and 2.4G modules enable NANLINK APP controllability, also support DMX/RDM control.
- 5. Optimized Structure** Innovated diffusion materials ensure LED chips obscured, provide better performance as in-frame practical light and for shooting highly-reflective objects.

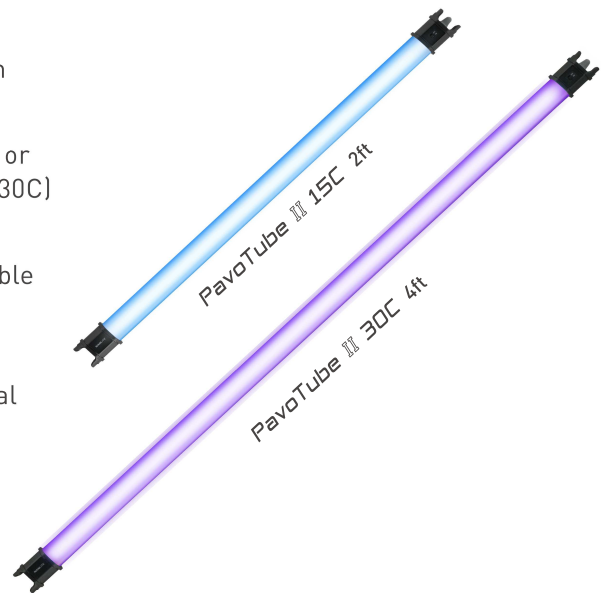

HUE LOOP	CCT LOOP	INT LOOP	FLASH	PULSE	STORM	POLICE CAR	
PAPARAZZI	CANDLE/FIRE	DISCO	BAD BULB	FIREWORK	EXPLOSION	WELDING	TV
On-board	Remote Controller	NANLINK APP	DMX/RDM				



NANLITE Global

## Accessories for T12 Tube Holder (Optional)



HD-T12-4-BHG

HD-T12-2-BHG

HD-T12-4-P

HD-T12-2-P

HD-T12-1-CP

HD-T12-1-BHP

HD-T12-1-LA

## Other Accessories (Optional)



HD-T12-1-MC  
Magnet Tube Clip

BD-PTII15C/30C+EC  
Barndoor & Eggcrate

LS-FL-T12  
T12 Floor Stand for  
II 15X/30X/15C/30C

FR-T12-8+SB  
8 Lights Frame with  
Softbox & Eggcrate for II 30X/30C

## Includes

		Light	Power Adapter	Power Cable 3M	HD-T12-1-C Clip	Steel Wire Rope	User Manual	Carrying Bag
<b>PavoTube II 15C</b>	1 KIT	×1	×1	×1	×1	×2	×1	×1
	2 KIT	×2	×2	×2	×2	×4	×1	×1
	4 KIT	×4	×4	×4	×4	×8	×1	×1
<b>PavoTube II 30C</b>	1 KIT	×1	×1	×1	×1	×2	×1	×1
	2 KIT	×2	×2	×2	×2	×4	×1	×1
	4 KIT	×4	×4	×4	×4	×8	×1	×1

## PavoTube II C Technical Data

Model	PavoTube II 15C	PavoTube II 30C
Rated Power	30W	60W
Input Voltage /Current	DC 15V/2A Max AC 100-240V 50/60Hz PD3.0 (9-20V) 20W Min	DC 15V/4A Max AC 100-240V 50/60Hz PD3.0 (12-20V) 30W Min
CRI/TLCI	Average 97 / Average 98	
CCT	2700K-7500K (G/M±150)	
TM-30	Rf: Average 94 / Rg: Average 101	
Dimming	0-100%	
Control	On-board, Remote Controller, NANLINK APP, DMX/RDM	
Product Size	φ 48 × 770mm / φ1.89 × 30.31"	φ 48 × 1170mm / φ1.89 × 46.06"
Product Weight	0.85kg / 1.87lb	1.4kg / 3.09lb

## Illumination (lux / fc)

Model	PavoTube II 15C		PavoTube II 30C	
	1M	2M	1M	2M
2700K	374 lux / 35 fc	103 lux / 10 fc	581 lux / 54 fc	174 lux / 16 fc
3200K	391 lux / 36 fc	107 lux / 10 fc	599 lux / 56 fc	179 lux / 17 fc
5600K	423 lux / 39 fc	113 lux / 10 fc	647 lux / 60 fc	193 lux / 18 fc
6500K	428 lux / 40 fc	117 lux / 11 fc	660 lux / 61 fc	196 lux / 18 fc
R	181 lux / 17 fc	50 lux / 5 fc	303 lux / 28 fc	88 lux / 8 fc
G	395 lux / 37 fc	108 lux / 10 fc	642 lux / 60 fc	181 lux / 17 fc
B	69 lux / 6 fc	19 lux / 2 fc	106 lux / 10 fc	30 lux / 3 fc