


Alien 150C / 300C

LED RGBWW Panel Light



1. Lightweight body 3.6kg (Alien 150C) and 6.6kg (Alien 300C), representing weight reductions of 13% and 45% respectively compared to similar-power products
2. Advanced optic design and color mixing technology enable a bright and even beam
3. Wide CCT range 2700K-12000K with green/magenta adjustment ± 150
4. Two output modes: Max Output and Constant Output
5. Newly designed user interface with intuitive icons and minimal textual information
6. Preset function allows quick saving and recalling specific lighting settings
7. IP55 rating lamp head and an exclusively designed rain cover for control unit
8. Included with innovative pop-up softbox for rapid setup

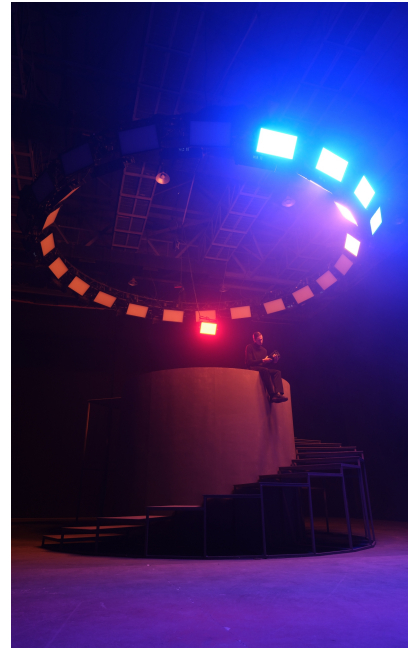

Includes

Light × 1, Control Unit × 1, DC Connection Cable 3M × 1, AC Power Cable 6M × 1, Pop-up Softbox × 1, Diffuser × 2 (Lite Diffuser × 1+Standard Diffuser × 1), Eggcrate × 1, AS-RCC-AL Rain Cover for Control Unit × 1, Quick Release Clamp × 1, User Manual × 1, Carrying Bag × 1

Accessories



BD-AL150/AL300
Barndoor (*optional)



SB-AL150/AL300
Softbox with Eggcrate



AS-RCC-AL
Rain Cover for Control Unit

Alien 150C / 300C Technical Data

Model	Alien 150C	Alien 300C
Rated Power	175W	350W
Input Voltage /Current	DC 24V DC(battery) 14.4V-28V AC 100-240V 50/60Hz	DC 48V DC(battery) 14.4V-28V AC 100-240V 50/60Hz
Beam Angle	60°	
CCT	2700K-12000K (G/M±150)	
CRI/TLCI	Average 96 / Average 97	
TM-30 Rf	Average 94	
TM-30 Rg	Average 100	
Dimming	0.0%-100.0%, by 0.1% increment	
IP Rating	lamp head: IP55, control unit: IP20	
Control	On-board, Remote Controller, NANLINK APP, DMX/RDM, LumenRadio CRMX	
Special Effects	CCT Loop, INT Loop, HUE Loop, Flash, Pulse, Storm, Police Car, TV, Paparazzi, Candle/Fire, Disco, Bad Bulb, Firework, Explosion and Welding	
Product Size	392 × 370 × 95mm / 15.43 × 14.57 × 3.74"	513.59 × 454.17 × 99.29mm / 20.22 × 17.88 × 3.91"
Product Weight	3.6kg / 7.94lb	6.6kg / 14.55lb

Illumination (lux/fc)

Light Only

Model	Alien 150C			Alien 300C		
	1M	3M	5M	1M	3M	5M
2700K	12040 lux / 1119 fc	1412 lux / 131 fc	549 lux / 51 fc	24450 lux / 2271 fc	2891 lux / 269 fc	1123 lux / 104 fc
3200K	12000 lux / 1115 fc	1402 lux / 130 fc	545 lux / 51 fc	25150 lux / 2336 fc	2980 lux / 277 fc	1160 lux / 108 fc
5600K	13050 lux / 1212 fc	1526 lux / 142 fc	593 lux / 55 fc	28630 lux / 2660 fc	3373 lux / 313 fc	1315 lux / 122 fc
6500K	12860 lux / 1195 fc	1503 lux / 140 fc	585 lux / 54 fc	28240 lux / 2623 fc	3305 lux / 307 fc	1289 lux / 120 fc
R	5460 lux / 507 fc	650 lux / 60 fc	253 lux / 24 fc	10930 lux / 1015 fc	1401 lux / 130 fc	575 lux / 53 fc
G	8489 lux / 789 fc	1014 lux / 94 fc	395 lux / 37 fc	17010 lux / 1580 fc	2063 lux / 192 fc	807 lux / 75 fc
B	1570 lux / 146 fc	184 lux / 17 fc	72 lux / 7 fc	3110 lux / 289 fc	370 lux / 34 fc	143 lux / 13 fc