

GUANGDONG NANGUANG PHOTO&VIDEO SYSTEMS CO., LTD.

Tel: +86-754-85751187 85310187

Fax: +86-754-85300887

E-mail: info@nanlite.com

Service Mail: service@nanlite.com

Add: Dongli Section, Highway 324, Chenghai, Shantou City, Guangdong Province, China



www.nanlite.com



WWW.NANLITE.COM



NANLINK APP
Download

NL202507-1



PavoSlim Series
Brochure



NANLITE
Linktree


NANLITE

PavoSlim Series

LED Panel Light

Guangdong Nanguang Photo&Video Systems Co., Ltd.

The PavoSlim series includes bi-color and full-color lights, featuring a slim, rugged, lightweight design, high illuminance, and easy setup. The lineup includes 8 models, available in sizes 1×1, 2×0.5, 2×1, 2×2, and 4×1.

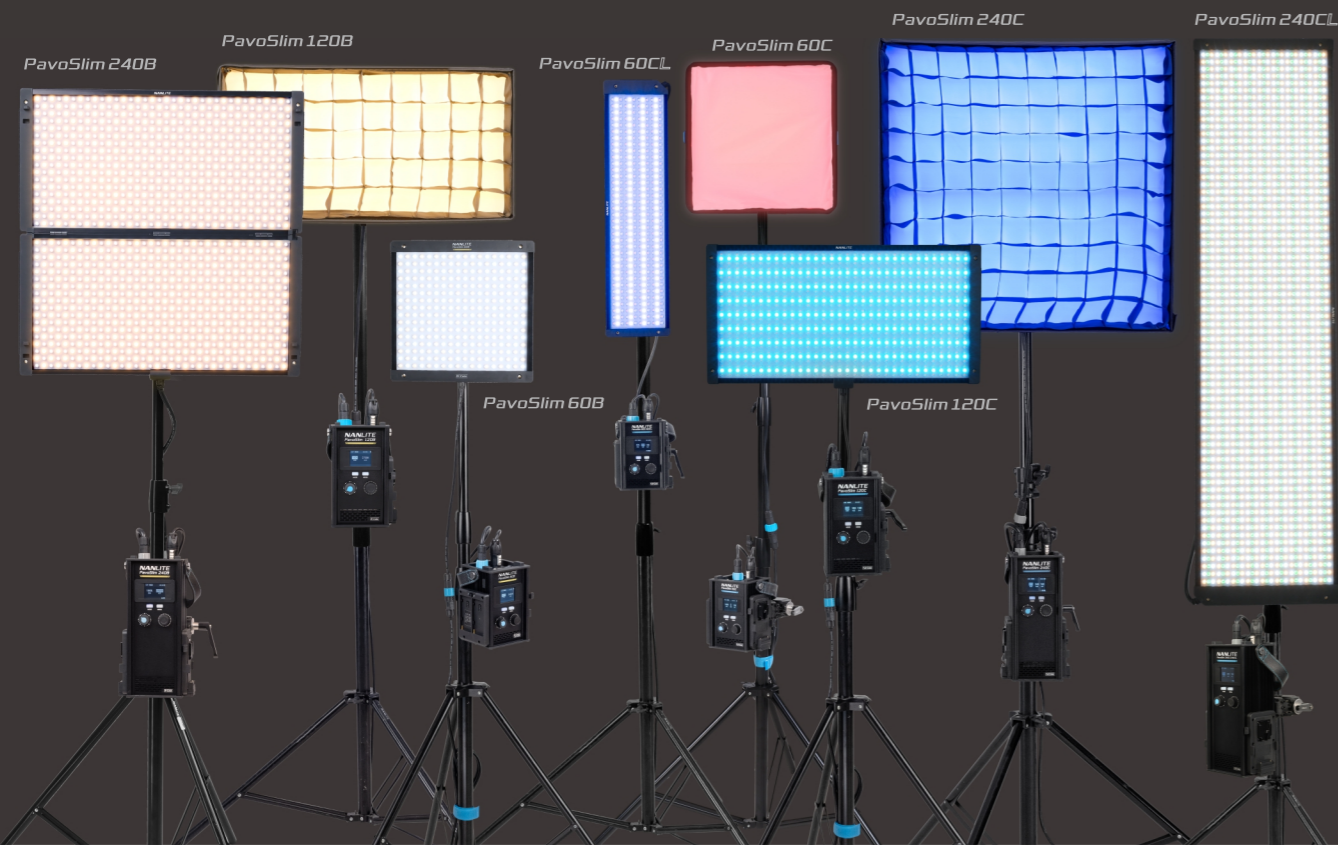

PavoSlim 60B/120B/240B Bi-color

LED Bi-color Panel Light Slim yet Rugged, Compact yet Bright



Rated Power
72W/150W/260W



CCT Range
2700K-6500K



Built-in
12 Practical
Effects



CRI: Average 95
TLCT: Average 97
TM-30 Rf: Average 95
TM-30 Rg: Average 102



Firmware
Upgradable




On-board
NANLINK APP
Remote Controller
DMX/RDM



AC/DC
Supply



PavoSlim 60B: 8156 lux@1m
PavoSlim 120B: 17620 lux@1m
PavoSlim 240B: 22990 lux@1m
(light only, 5600K)

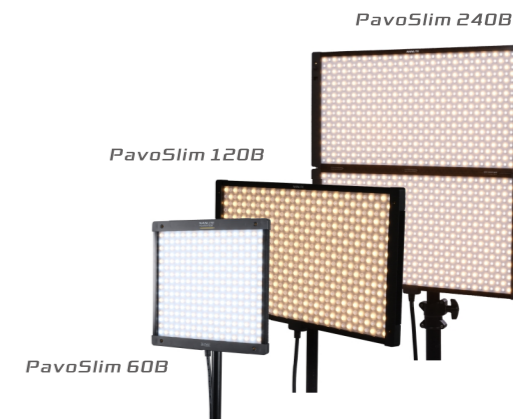

Includes

Light × 1, Control Unit × 1, DC Connection Cable × 1, AC Power Cable 4.5M × 1, Softbox × 1, Diffuser × 2 (Lite Diffuser × 1+Standard Diffuser × 1), Eggcrate × 1, Universal Holder × 1, User Manual × 1, Carrying Bag × 1

Note: PavoSlim 60B/120B: DC Connection Cable 2.6M
PavoSlim 240B: DC Connection Cable 5M

PavoSlim 60C/60CL/120C/240C/240CL Full-color

LED RGBWW Panel Light Slim yet Rugged, Compact yet Bright



Rated Power
72W/150W/260W



CCT Range
2700K-7500K



Built-in 15
Practical
Effects



CRI: Average 96
TLCI: Average 97
TM-30 Rf: Average 94
TM-30 Rg: Average 100



Firmware
Upgradable



Quick Release
Device



AC/DC
Supply



PavoSlim 60C: 7074 lux@1m
PavoSlim 60CL: 7094 lux@1m
PavoSlim 120C: 12830 lux@1m
PavoSlim 240C: 24970 lux@1m
PavoSlim 240CL: 21030 lux@1m
(light only, 5600K)




On-board
NANLINK APP
Remote Controller
DMX/RDM
LumenRadio CRMX



±150



HSI/RGBW/Gel

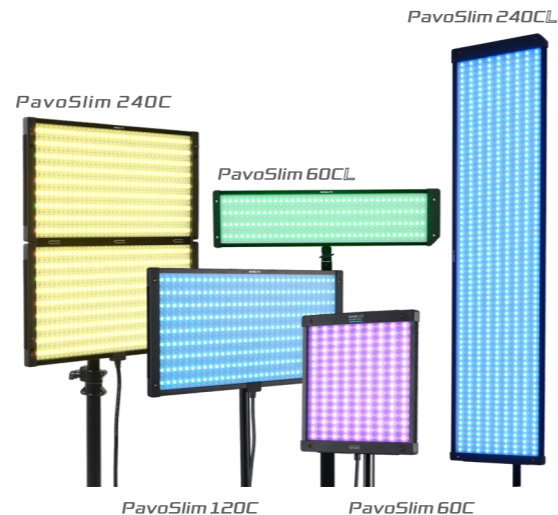

Includes

Light × 1, Control Unit × 1, DC Connection Cable × 1, AC Power Cable 4.5M × 1, Softbox × 1, Diffuser × 2 (Standard Diffuser × 1+Lite Diffuser × 1), Eggcrate × 1, Universal Holder × 1, Quick Release Clamp × 1, Baby Pin Holder × 1, User Manual × 1, Carrying Bag × 1

Note: PavoSlim 60C/60CL/120C: DC Connection Cable 2.6M
PavoSlim 240C/240CL: DC Connection Cable 5M

Accessories (Optional)



SB-PS60-F
PavoSlim 60B/60C Foldable
Softbox with Eggcrate



SB-PS120-F
PavoSlim 120B/120C Foldable
Softbox with Eggcrate



SB-PS60-Q
PavoSlim 60B/60C Pop-up
Softbox with Eggcrate




SB-PS120-Q
PavoSlim 120B/120C Pop-up
Softbox with Eggcrate



CB-PS-2.6M/5M/7.5M
PavoSlim DC Connection Cable
2.6M/5M/7.5M (Included)



AS-MBA-1/4-SET
Magnetic Base Adapter with
1/4"-20 Thread Set (4pcs)

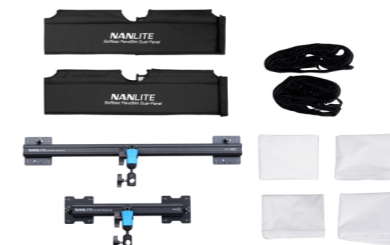

AS-DPC-PS120-KIT
PavoSlim 120B/C Dual-Panel Coupler Kit



AS-DPC-PS240CL-KIT
PavoSlim 240CL Dual-Panel Coupler Kit

PavoSlim Kit



PavoSlim 60B KIT-QR

PavoSlim 60B × 1
Control Unit × 1
Universal Holder × 1
Baby Pin Holder × 1
DC Connection Cable 2.6M × 1
AC Power Cable 4.5M × 1
Softbox SB-PS60-Q × 1
Diffuser × 2 (Lite Diffuser × 1+Standard Diffuser × 1)
Eggcrate × 1
Quick Release Clamp × 1
User Manual × 1
Carrying Bag × 1



PavoSlim 120B KIT-QR

PavoSlim 120B × 1
Control Unit × 1
Universal Holder × 1
Baby Pin Holder × 1
DC Connection Cable 2.6M × 1
AC Power Cable 4.5M × 1
Quick Release Softbox × 1
Diffuser × 2 (Lite Diffuser × 1+Standard Diffuser × 1)
Eggcrate × 1
Quick Release Clamp × 1
User Manual × 1
Carrying Bag × 1

PavoSlim Kit



PavoSlim 60B 2KIT-S

PavoSlim 60B × 2
Control Unit × 2
Universal Holder × 2
DC Connection Cable 2.6M × 2
AC Power Cable 4.5M × 2
Softbox SB-PS60-Q × 2
Diffuser × 2 (Lite Diffuser × 1+Standard Diffuser × 1)
Eggcrate × 2
User Manual × 1
Carrying Bag × 1



PavoSlim 60B 2KIT-S-LS

PavoSlim 60B × 2
Control Unit × 2
Universal Holder × 2
DC Connection Cable 2.6M × 2
AC Power Cable 4.5M × 2
Softbox SB-PS60-Q × 2
Diffuser × 2 (Lite Diffuser × 1+Standard Diffuser × 1)
Eggcrate × 2
User Manual × 1
Carrying Bag × 1
Light Stand LS-186-5/8 × 2

PavoSlim Kit



PavoSlim 60B-Forza 60BII-3KIT-LS-S

- | | |
|---|----------------------------|
| PavoSlim 60B × 2 | Forza 60B II × 1 |
| Control Unit × 2 | Power Adapter × 1 |
| Universal Holder × 2 | Power Cable 3M × 1 |
| DC Connection Cable 2.6M × 2 | COB Protective Cap × 1 |
| AC Power Cable 4.5M × 2 | Reflector RF-FMM-45-S × 2 |
| Softbox SB-PS60-Q × 2 | Light Stand LS-186-5/8 × 2 |
| Diffuser × 4 | Fresnel Lens FL-11 × 1 |
| (Lite Diffuser × 2+Standard Diffuser × 2) | Battery Grip BH-FZ60-V × 1 |
| Eggcrate × 2 | User Manual × 2 |
| Quick Release Clamp × 2 | Trolley Case × 1 |



PavoSlim 60B 3KIT-LS-ST

- | |
|--|
| PavoSlim 60B × 3 |
| Control Unit × 3 |
| Universal Holder × 3 |
| Quick Release Clamp × 3 |
| DC Connection Cable 2.6M × 3 |
| AC Power Cable 4.5M × 3 |
| Softbox SB-PS60-Q × 3 |
| Diffuser × 6 (Lite Diffuser × 3+Standard Diffuser × 3) |
| Eggcrate × 3 |
| User Manual × 1 |
| Light Stand LS-186-5/8 × 3 |
| Trolley Case × 1 |



@ Hugo Boué

PavoSlim Technical Data

Model	PavoSlim 60B	PavoSlim 60C
Rated Power	72W	
Input Voltage/Current	DC(Battery)14.4-26V, DC(Battery)7.4V × 2, AC100-240V 50/60Hz	
CRI/TLCI	Average 95 / Average 97	Average 96 / Average 97
CCT	2700K-6500K	2700K-7500K (G/M±150)
TM-30 Rf/Rg	Average 95 / Average 102	Average 94 / Average 100
Dimming	0-100%	
Control	On-board, Remote Controller, NANLINK APP, DMX/RDM	On-board, Remote Controller, NANLINK APP, LumenRadio CRMX, DMX/RDM
Special Effects	HUE Loop*, CCT Loop, INT Loop, Flash, Pulse, Storm, Police Car*, TV, Paparazzi, Candle/Fire, Disco*, Bad Bulb, Firework, Explosion and Welding (*PavoSlim 60C only)	
Product Size	Light Fixture: 306.3 × 300.65 × 18.6mm / 12.06 × 11.84 × 0.73" Control Unit: 146.45 × 111.48 × 175mm / 5.77 × 4.39 × 6.89"	
Product Weight	Light Fixture: 0.91kg / 2.01lb Control Unit: 1.37kg / 3.02lb	Light Fixture: 0.94kg / 2.07lb Control Unit: 1.37kg / 3.02lb

Illumination (lux / fc)

Distance	PavoSlim 60B				PavoSlim 60C							
	2700K	3200K	5600K	6500K	2700K	3200K	5600K	7500K	R	G	B	
Light Only	0.5M	25160 lux 2337 fc	26350 lux 2448 fc	29180 lux 2711 fc	28140 lux 2614 fc	20780 lux 1930 fc	22310 lux 2073 fc	24900 lux 2313 fc	23700 lux 2202 fc	9530 lux 885 fc	17520 lux 1628 fc	2510 lux 233 fc
	1M	7063 lux 656 fc	7433 lux 691 fc	8156 lux 758 fc	7893 lux 733 fc	5912 lux 549 fc	6362 lux 591 fc	7074 lux 657 fc	6728 lux 625 fc	2580 lux 240 fc	4595 lux 427 fc	660 lux 61 fc
	3M	840 lux 78 fc	871 lux 81 fc	955 lux 89 fc	918 lux 85 fc	717 lux 67 fc	769 lux 71 fc	849 lux 79 fc	809 lux 75 fc	305 lux 28 fc	544 lux 51 fc	78 lux 7 fc
With Softbox and Lite Diffuser	0.5M	12060 lux 1120 fc	12790 lux 1188 fc	14150 lux 1315 fc	13750 lux 1277 fc	10250 lux 952 fc	11130 lux 1034 fc	12360 lux 1148 fc	11820 lux 1098 fc	5090 lux 473 fc	9604 lux 892 fc	1400 lux 130 fc
	1M	2987 lux 277 fc	3130 lux 291 fc	3470 lux 322 fc	3356 lux 312 fc	2528 lux 235 fc	2732 lux 254 fc	3034 lux 282 fc	2885 lux 268 fc	1233 lux 115 fc	2308 lux 214 fc	334 lux 31 fc
	3M	342 lux 32 fc	352 lux 33 fc	391 lux 36 fc	377 lux 35 fc	290 lux 27 fc	313 lux 29 fc	349 lux 32 fc	332 lux 31 fc	148 lux 14 fc	268 lux 25 fc	39 lux 4 fc
With Softbox and Standard Diffuser	0.5M	5040 lux 468 fc	5282 lux 491 fc	5868 lux 545 fc	5694 lux 529 fc	5648 lux 525 fc	6161 lux 572 fc	6787 lux 631 fc	6452 lux 599 fc	2885 lux 268 fc	5455 lux 507 fc	810 lux 75 fc
	1M	1148 lux 107 fc	1199 lux 111 fc	1328 lux 123 fc	1282 lux 119 fc	1250 lux 116 fc	1356 lux 126 fc	1525 lux 142 fc	1444 lux 134 fc	664 lux 62 fc	1202 lux 112 fc	178 lux 17 fc
	3M	131 lux 12 fc	137 lux 13 fc	152 lux 14 fc	146 lux 14 fc	138 lux 13 fc	149 lux 14 fc	166 lux 15 fc	158 lux 15 fc	73 lux 7 fc	132 lux 12 fc	19 lux 2 fc

PavoSlim Technical Data

Model	PavoSlim 60CL	PavoSlim 240CL
Rated Power	72W	260W
Input Voltage/Current	AC100-240V 50/60Hz DC(Battery)14.4-26V DC(Battery)7.4V × 2	AC100-240V 50/60Hz DC48V/5.6A DC(Battery) 14.4-26V
Beam Angle	60°	
CCT	2700K-7500K (G/M±150)	
CRI/TLCI	Average 96 / Average 97	
TM-30 Rf/Rg	Average 94 / Average 100	
Dimming	0-100%	
Control	On-board, Remote Controller, NANLINK APP, DMX/RDM, LumenRadio CRMX	
Special Effects	HUE Loop, CCT Loop, INT Loop, Flash, Pulse, Storm, Police Car, TV, Paparazzi, Candle/Fire, Disco, Bad Bulb, Firework, Explosion and Welding	
Product Size	Light Fixture: 602 × 152 × 18.6mm / 23.70 × 5.98 × 0.73" Control Unit: 146.45 × 111.48 × 175mm / 5.77 × 4.39 × 6.89"	Light Fixture: 1205.5 × 307.3 × 23.5mm / 47.46 × 12.10 × 0.93" Control Unit: 152.6 × 111.5 × 283mm / 6.01 × 4.39 × 11.14"
Product Weight	0.98kg / 2.16lb	3.62kg / 7.98lb

Illumination (lux / fc)

Distance	PavoSlim 60CL				PavoSlim 240CL							
	2700K	3200K	5600K	7500K	2700K	3200K	5600K	7500K	R	G	B	
Light Only	0.5M	18430 lux 1712 fc	18700 lux 1737 fc	22110 lux 2054 fc	21590 lux 2006 fc	40650 lux 3776 fc	44520 lux 4136 fc	48180 lux 4476 fc	46420 lux 4312 fc	20520 lux 1906 fc	37620 lux 3495 fc	6940 lux 645 fc
	1M	5857 lux 544 fc	6012 lux 559 fc	7094 lux 659 fc	6952 lux 646 fc	17690 lux 1643 fc	19570 lux 1818 fc	21030 lux 1954 fc	20150 lux 1872 fc	8350 lux 776 fc	15570 lux 1446 fc	1900 lux 177 fc
	3M	735 lux 68 fc	750 lux 70 fc	880 lux 82 fc	864 lux 80 fc	2888 lux 268 fc	3153 lux 293 fc	3404 lux 316 fc	3279 lux 305 fc	1267 lux 118 fc	2240 lux 208 fc	273 lux 25 fc
With Softbox and Lite Diffuser	0.5M	9300 lux 864 fc	9550 lux 887 fc	11280 lux 1048 fc	11000 lux 1022 fc	26200 lux 2434 fc	28930 lux 2688 fc	31470 lux 2924 fc	30190 lux 2805 fc	13350 lux 1240 fc	25430 lux 2362 fc	3240 lux 301 fc
	1M	2577 lux 239 fc	2651 lux 246 fc	3130 lux 291 fc	3056 lux 284 fc	9140 lux 849 fc	10070 lux 936 fc	10850 lux 1008 fc	10280 lux 955 fc	4690 lux 436 fc	8644 lux 803 fc	1100 lux 102 fc
	3M	296 lux 27 fc	304 lux 28 fc	359 lux 33 fc	350 lux 33 fc	1255 lux 117 fc	1375 lux 128 fc	1483 lux 138 fc	1433 lux 133 fc	655 lux 61 fc	1171 lux 109 fc	145 lux 13 fc
With Softbox and Standard Diffuser	0.5M	4891 lux 454 fc	4988 lux 463 fc	5905 lux 549 fc	5771 lux 536 fc	15710 lux 1459 fc	17310 lux 1608 fc	18650 lux 1733 fc	17830 lux 1656 fc	8190 lux 761 fc	15390 lux 1430 fc	2060 lux 191 fc
	1M	1219 lux 113 fc	1238 lux 115 fc	1465 lux 136 fc	1423 lux 132 fc	4678 lux 435 fc	5149 lux 478 fc	5571 lux 518 fc	5334 lux 496 fc	2391 lux 222 fc	4631 lux 430 fc	620 lux 58 fc
	3M	139 lux 13 fc	141 lux 13 fc	167 lux 16 fc	163 lux 15 fc	604 lux 56 fc	664 lux 62 fc	720 lux 67 fc	695 lux 65 fc	330 lux 31 fc	598 lux 56 fc	79 lux 7 fc

PavoSlim Technical Data

Model	PavoSlim 120B	PavoSlim 120C
Rated Power	150W	
Input Voltage/Current	DC24V, DC(Battery)14.4-26V, AC100-240V 50/60Hz	
CRI/TLCI	Average 95 / Average 97	Average 96 / Average 97
CCT	2700K-6500K	2700K-7500K (G/M±150)
TM-30 Rf/Rg	Average 95 / Average 102	Average 94 / Average 100
Dimming	0-100%	
Control	On-board, Remote Controller, NANLINK APP, DMX/RDM	On-board, Remote Controller, NANLINK APP, LumenRadio CRMX, DMX/RDM
Special Effects	HUE Loop*, CCT Loop, INT Loop, Flash, Pulse, Storm, Police Car*, TV, Paparazzi, Candle/Fire, Disco*, Bad Bulb, Firework, Explosion and Welding (*PavoSlim 120C only)	
Product Size	Light Fixture: 602 × 306.3 × 18.6mm / 23.7 × 12.06 × 0.73" Control Unit: 140.3 × 111.48 × 203mm / 5.52 × 4.39 × 7.99"	
Product Weight	Light Fixture: 1.65kg / 3.64lb Control Unit: 1.84kg / 4.06lb	Light Fixture: 1.76kg / 3.88lb Control Unit: 1.84kg / 4.06lb

Illumination (lux / fc)


Distance	PavoSlim 120B				PavoSlim 120C							
	2700K	3200K	5600K	6500K	2700K	3200K	5600K	7500K	R	G	B	
Light Only	0.5M	46250 lux 4297 fc	48830 lux 4536 fc	52200 lux 4849 fc	53600 lux 4979 fc	29550 lux 2745 fc	31750 lux 2950 fc	36240 lux 3367 fc	34450 lux 3200 fc	15500 lux 1440 fc	27300 lux 2536 fc	3830 lux 356 fc
	1M	15480 lux 1438 fc	16210 lux 1506 fc	17620 lux 1637 fc	18010 lux 1673 fc	10500 lux 975 fc	11200 lux 1040 fc	12830 lux 1192 fc	12240 lux 1137 fc	5100 lux 474 fc	8655 lux 804 fc	1290 lux 120 fc
	3M	1945 lux 181 fc	2035 lux 189 fc	2210 lux 205 fc	2253 lux 209 fc	1388 lux 129 fc	1475 lux 137 fc	1675 lux 156 fc	1594 lux 148 fc	641 lux 60 fc	1063 lux 99 fc	156 lux 14 fc
With Softbox and Lite Diffuser	0.5M	22420 lux 2083 fc	23400 lux 2174 fc	25660 lux 2384 fc	26240 lux 2438 fc	17360 lux 1613 fc	18570 lux 1725 fc	21320 lux 1981 fc	20050 lux 1863 fc	9150 lux 850 fc	16680 lux 1550 fc	2590 lux 241 fc
	1M	6495 lux 603 fc	6812 lux 633 fc	7435 lux 691 fc	7601 lux 706 fc	4850 lux 451 fc	5191 lux 482 fc	5944 lux 552 fc	5624 lux 522 fc	2573 lux 239 fc	4536 lux 421 fc	780 lux 72 fc
	3M	784 lux 73 fc	819 lux 76 fc	888 lux 82 fc	912 lux 85 fc	579 lux 54 fc	621 lux 58 fc	711 lux 66 fc	670 lux 62 fc	296 lux 27 fc	536 lux 50 fc	90 lux 8 fc
With Softbox and Standard Diffuser	0.5M	10360 lux 962 fc	10850 lux 1008 fc	11810 lux 1097 fc	12100 lux 1124 fc	10420 lux 968 fc	11160 lux 1037 fc	12720 lux 1182 fc	12050 lux 1119 fc	5650 lux 525 fc	10120 lux 940 fc	1650 lux 153 fc
	1M	2542 lux 236 fc	2676 lux 249 fc	2913 lux 271 fc	2968 lux 276 fc	2460 lux 229 fc	2635 lux 245 fc	3026 lux 281 fc	2856 lux 265 fc	1334 lux 124 fc	2380 lux 221 fc	375 lux 35 fc
	3M	301 lux 28 fc	311 lux 29 fc	337 lux 31 fc	345 lux 32 fc	290 lux 27 fc	312 lux 29 fc	357 lux 33 fc	337 lux 31 fc	161 lux 15 fc	281 lux 26 fc	53 lux 5 fc

PavoSlim Technical Data

Model	PavoSlim 240B	PavoSlim 240C
Rated Power	260W	
Input Voltage/Current	DC 48V/5.6A, DC(Battery)14.4-26V, AC100-240V 50/60Hz	
CRI/TLCI	Average 95 / Average 97	Average 96 / Average 97
CCT	2700K-6500K	2700K-7500K (G/M±150)
TM-30 Rf/Rg	Average 95 / Average 102	Average 94 / Average 100
Dimming	0-100%	
Control	On-board, Remote Controller, NANLINK APP, DMX/RDM	On-board, Remote Controller, NANLINK APP, LumenRadio CRMX, DMX/RDM
Special Effects	HUE Loop*, CCT Loop, INT Loop, Flash, Pulse, Storm, Police Car*, TV, Paparazzi, Candle/Fire, Disco*, Bad Bulb, Firework, Explosion and Welding (*PavoSlim 240C only)	
Product Size	Light Fixture: Unfolded: 608.7 × 602.1 × 28.6mm / 23.96 × 23.70 × 1.13" Folded: 318.4 × 602.1 × 38.2mm / 12.54 × 23.70 × 1.50" Control Unit: 152.6 × 111.5 × 283mm / 6.01 × 4.39 × 11.14"	
Product Weight	Light Fixture: 3.44kg / 7.58lb Control Unit: 2.65kg / 5.84lb	Light Fixture: 3.65kg / 8.05lb Control Unit: 2.76kg / 6.08lb

Illumination (lux / fc)


Distance	PavoSlim 240B				PavoSlim 240C							
	2700K	3200K	5600K	6500K	2700K	3200K	5600K	6500K	R	G	B	
Light Only	0.5M	51370 lux 4772 fc	53990 lux 5016 fc	59800 lux 5555 fc	60800 lux 5648 fc	52270 lux 4856 fc	57230 lux 5317 fc	63650 lux 5913 fc	63120 lux 5864 fc	27270 lux 2533 fc	48710 lux 4525 fc	9170 lux 852 fc
	1M	19920 lux 1851 fc	20890 lux 1941 fc	22990 lux 2136 fc	23410 lux 2175 fc	20690 lux 1922 fc	22770 lux 2115 fc	24970 lux 2320 fc	24930 lux 2316 fc	10390 lux 965 fc	16770 lux 1558 fc	2060 lux 191 fc
	3M	2668 lux 248 fc	2784 lux 259 fc	3060 lux 284 fc	3108 lux 289 fc	2868 lux 266 fc	3130 lux 291 fc	3441 lux 320 fc	3432 lux 319 fc	1364 lux 127 fc	2145 lux 199 fc	260 lux 24 fc
With Softbox and Lite Diffuser	0.5M	29360 lux 2728 fc	30770 lux 2859 fc	34350 lux 3191 fc	34890 lux 3241 fc	29750 lux 2764 fc	32940 lux 3060 fc	36140 lux 3357 fc	35900 lux 3335 fc	16260 lux 1511 fc	28330 lux 2632 fc	5440 lux 505 fc
	1M	9640 lux 896 fc	10130 lux 941 fc	11220 lux 1042 fc	11410 lux 1060 fc	9960 lux 925 fc	10900 lux 1013 fc	12010 lux 1116 fc	11870 lux 1103 fc	5430 lux 504 fc	9080 lux 844 fc	1130 lux 105 fc
	3M	1234 lux 115 fc	1296 lux 120 fc	1434 lux 133 fc	1461 lux 136 fc	1275 lux 118 fc	1398 lux 130 fc	1533 lux 142 fc	1527 lux 142 fc	696 lux 65 fc	1154 lux 107 fc	143 lux 13 fc
With Softbox and Standard Diffuser	0.5M	15720 lux 1460 fc	16470 lux 1530 fc	18350 lux 1705 fc	18680 lux 1735 fc	16180 lux 1503 fc	17910 lux 1664 fc	19530 lux 1814 fc	19350 lux 1798 fc	9230 lux 857 fc	15470 lux 1437 fc	2040 lux 190 fc
	1M	4458 lux 414 fc	4678 lux 435 fc	5197 lux 483 fc	5286 lux 491 fc	4575 lux 425 fc	5011 lux 466 fc	5517 lux 513 fc	5483 lux 509 fc	2571 lux 239 fc	4334 lux 403 fc	570 lux 53 fc
	3M	548 lux 51 fc	577 lux 54 fc	639 lux 59 fc	650 lux 60 fc	565 lux 52 fc	619 lux 58 fc	681 lux 63 fc	675 lux 63 fc	327 lux 30 fc	535 lux 50 fc	70 lux 7 fc

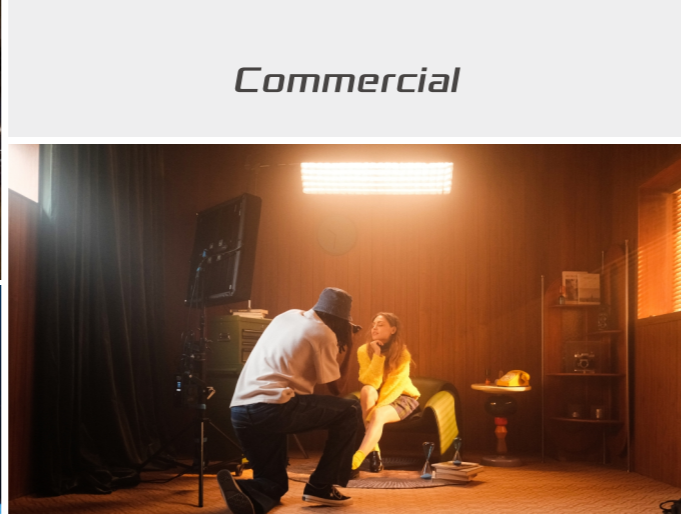

Commercial



@ Pooya Hoseinnezhad

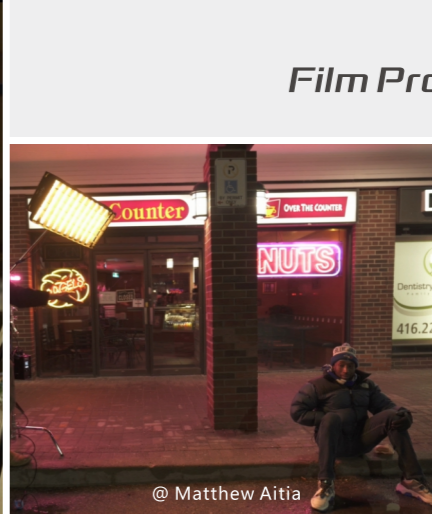

@ Matthew Aitia



@ Hugo Boué

Photography



@ Hayden Pedersen



@ Brayden Mui



Interview/Live Stream

