


miro 30c / 60c


LED Full-color Round Panel Light



1. Compact round design: slightly larger than a CD (miro 30c), comparable to a salad plate (miro 60c)
2. Equipped with Nebula C4 Light Engine
3. Wide CCT range of 2700K–7500K with ± 150 green/magenta adjustment
4. Exceptional output 4,854 lux (miro 30c), and 8,382 lux (miro 60c) at 1m, 5600K
5. 360° rotatable yoke with 20 tilt positions and a 1/4"-20 mount
6. NP-F battery compatibility and PD input (9–20V PD3.0)
7. RG0 certificated, ensures zero blue light hazard to eyes or skin
8. Two color choices: mint blue and midnight blue

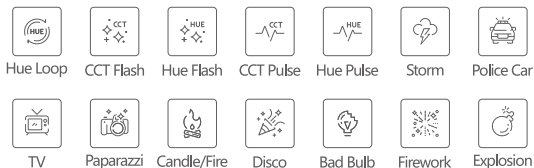

Includes



miro 30c/60c × 1 Magnetic Diffuser × 1 USB-C Cable × 1 5/8" Baby Receiver with 1/4"-20 Thread × 1 User Manual × 1 Carrying Bag × 1

miro 30c / 60c *Technical Data*

Model	miro 30c	miro 60c
Rated Power	30W	60W
Input Voltage/ Current	7.4V NP-F battery PD3.0 adapter PD3.0 (9-20V) 20W Min	2×7.4V NP-F batteries PD3.0 adapter PD3.0 (9-20V) 20W Min
Beam Angle	45° (without magnetic diffuser)	
CCT	2700K-7500K (G/M±150)	
CRI/TLCI	Average 95 / Average 93	
TM-30 Rf/Rg	Average 92 / Average 99	
Dimming	0%-100%, by 1% increment	
Control	On-board, NANLINK APP	
Battery Runtime	100% brightness: about 1 hour (NP-F750 battery, 5200mAh) 100% brightness: about 1 hour 30 mins (NP-F970 battery, 7800mAh)	100% brightness: about 1 hour 3 mins (NP-F750 battery, 5200mAh) 100% brightness: about 1 hour 38 mins (NP-F970 battery, 7800mAh)
Special Effect	Hue Loop, CCT Flash, Hue Flash, CCT Pulse, Hue Pulse, Storm, Police Car, TV, Paparazzi, Candle/Fire, Disco, Bad Bulb, Firework and Explosion	
Product Size	Light Fixture: 180.7 × 183.4 × 30.7mm / 7.11 × 7.22 × 1.21" Magnetic Diffuser: Φ166.5 × 12.6mm / 6.56 × 0.50"	Light Fixture: 222.6 × 228.2 × 33.7mm / 8.76 × 8.98 × 1.33" Magnetic Diffuser: Φ208.4 × 12.6mm / 8.20 × 0.50"
Product Weight	Light Fixture: 0.33kg / 0.73lb Magnetic Diffuser: 0.06kg / 0.132lb	Light Fixture: 0.74kg / 1.63lb Magnetic Diffuser: 0.09kg / 0.198lb

Illumination (lux / fc)

Distance		miro 30c			miro 60c		
		0.5M	1M	2M	0.5M	1M	2M
Light Only	3200K	18600 lux 1728 fc	4740 lux 440 fc	1175 lux 109 fc	30730 lux 2855 fc	8181 lux 760 fc	2087 lux 194 fc
	5600K	19070 lux 1772 fc	4854 lux 451 fc	1207 lux 112 fc	31590 lux 2935 fc	8382 lux 779 fc	2130 lux 198 fc
	R	2803 lux 260 fc	716 lux 67 fc	170 lux 16 fc	4680 lux 435 fc	1150 lux 107 fc	298 lux 28 fc
	G	12830 lux 1192 fc	3260 lux 303 fc	804 lux 75 fc	20730 lux 1926 fc	5467 lux 508 fc	1393 lux 129 fc
	B	2080 lux 193 fc	550 lux 51 fc	128 lux 12 fc	3450 lux 321 fc	920 lux 85 fc	218 lux 20 fc
With Magnetic Diffuser	3200K	3499 lux 325 fc	843 lux 78 fc	209 lux 19 fc	6233 lux 579 fc	1521 lux 141 fc	386 lux 36 fc
	5600K	3601 lux 335 fc	864 lux 80 fc	214 lux 20 fc	6412 lux 596 fc	1566 lux 145 fc	397 lux 37 fc
	R	500 lux 46 fc	127 lux 12 fc	30 lux 3 fc	863 lux 80 fc	209 lux 19 fc	54 lux 5 fc
	G	2421 lux 225 fc	583 lux 54 fc	145 lux 13 fc	4232 lux 393 fc	1033 lux 96 fc	261 lux 24 fc
	B	410 lux 38 fc	99 lux 9 fc	24 lux 2 fc	750 lux 70 fc	174 lux 16 fc	43 lux 4 fc